

Systematic synthesis of sustainable biorefineries: A review

Mariano Martín^{a,b}, Ignacio E. Grossmann^{b,1}

^aDepartamento de Ingeniería Química y Textil. Universidad de Salamanca. 37008 Salamanca, Spain

^bDepartment of Chemical Engineering. Carnegie Mellon University. Pittsburgh PA. 15213

Abstract.

In this paper we review the current effort towards the design of production processes from different sources of biomass including first, second and third generation of biofuels such as bioethanol, biodiesel, hydrogen, FT-diesel. We review results of the design of these processes using advanced mathematical programming techniques to systematically evaluate a large number of alternative technologies, by optimally integrating the use of raw material, energy and water in order for the process not only to be economically feasible but also sustainable. Integration of processes is the future of biorefineries to exploit synergies to reduce the production cost.

Keywords: Bioethanol, Biodiesel, Hydrogen, Mathematical programming.

¹ Corresponding autor. grossmann@cmu.edu

1.-Introduction

The production of biofuels has become a short and medium term solution to the increase in the demand for fuel in the transportation sector due to their compatibility with the supply chain of the crude based fuels as well as with the current automobiles, which can use biodiesel, bioethanol or a blend with crude based fuels with few or no changes in their design. However, the first generation of ethanol and biodiesel presented a number of ethical problems related to the use of the raw materials for food or fuel as well as the competition for the use of land devoted to the production of those raw materials. Those concerns, largely due to social pressure, have been addressed in the second and third generation of biofuels, which use waste from the forest industry, cooking oil, lignocellulosic raw materials or algae. However, there are also concerns on the actual sustainability of the production process of biofuels mainly due to the consumption of energy and water. While energy consumption has always been a top priority in any production process as a result of its direct impact on the production cost, water consumption has also become a major concern due to its increasing shortage in certain parts of the world. For instance, some of the first generation bioethanol production facilities could not operate in the mid-West of the US due to the shortage of this relatively cheap utility. The studies from the first production facilities for ethanol using corn have not been encouraging since they report large values of water and energy consumption compared to the production of crude based gasoline.¹⁻³ Therefore, the operation of the first generation of bioethanol plants has presented a series of challenges that also put to the test the design of the processes for second generation of biofuels. However, there are still reasons for optimism. The first biorefineries for the production of bioethanol⁴ and biodiesel were designed without making use of tools long applied in the petrochemical industry. More recently, the use of case study based simulation has provided a more systematic approach to the evaluation of the process and its economics.⁵⁻¹⁰ However, bioprocesses pose special features such as exothermic fermentation reactions that operate at low temperature and are not a source of heat as in traditional petrochemical plants. Furthermore, bioprocesses tend to require a large amount of water or large energy demand in distillation columns for separating highly diluted mixtures. All these poses an important number of challenges¹¹ that require the use of advanced process synthesis and optimization methods in order to ensure that these processes are economically viable, energy efficient and with minimum environmental impact. Therefore, an improvement in the water and

energy efficiency of biofuel production processes is expected so long as systematic methods are used.

To introduce the available systematic techniques for process design, integration and optimization, we first briefly review the advances in the area of process systems. Process synthesis is a relatively new area within Chemical Engineering that deals with the selection of the topology of a process in order to convert a set of inputs into a desired set of outputs.¹² The objective is to find designs with minimum cost or maximum profit, even though objectives such as maximizing efficiency or minimum usage of a resource (e.g. energy or freshwater) can also be considered. Major approaches to synthesize optimal process flowsheets that meet the desired objectives include the use of heuristics, physical insights (commonly based on thermodynamics and first principles), and the optimization of superstructures of alternatives. Major contributions in the first two approaches have been the hierarchical decomposition¹³ and the pinch analysis¹⁴ that has proved to be very successful in industrial applications. The more recent trend has been to combine some of these concepts with the mathematical programming approach¹⁵ which consists of three major steps. The first is the development of a superstructure representation of alternatives from which the optimum solution is selected. The second is the formulation of a mathematical program that generally involves discrete and continuous variables for the selection of the configuration and operating levels from the superstructure. The third is the solution of the optimization model (commonly a mixed-integer nonlinear programming, MINLP, or a generalized disjunctive programming, GDP, model) from which the optimal solution is determined. While superstructures can be developed in a systematic way for subsystems, e.g. for heat exchanger networks (e.g. see Yee and Grossmann¹⁶), their development for general process flowsheets is more complex.¹⁷ Chemical and physical principles and engineering knowhow of the process must be understood to postulate alternative technologies for carrying out the transformations. As for the problem formulation, it is important to note that synthesis models can be formulated at three major levels of detail: (a) high level aggregated models that are expressed in terms of major features like mass and energy flows (e.g. LP transshipment model for HEN by Papoulias and Grossmann¹⁸; NLP heat and mass exchanger model by Papalexandri and Pistikopoulos¹⁹); (b) short-cut models that involve relatively simple nonlinear models for cost optimization (investment and operating costs) (e.g. MINLP heat exchanger networks by Yee and Grossmann¹⁶ ; MINLP process flowsheets by Kocis and Grossmann²⁰); (c)

rigorous models that rely on detailed and complex models for predicting the performance of the units (e.g. MINLP synthesis of distillation sequences²¹ and GDP models.²²

It should be noted that at the level of process synthesis two major subproblems that have had major significance for sustainability are optimization of energy recovery and water management. Here the calculation of the minimum utility cost can be determined with the LP model by Papoulias & Grossmann¹⁸, while the specific network can be synthesized with the MINLP model by Yee and Grossmann.¹⁶ Furthermore, the simultaneous optimization and heat integration of a process can be modeled with the constraints by Duran and Grossmann.²³ However, this method is restricted to nonisothermal streams. Grossmann, Yeomans, and Kravanja²⁴ have extended this model for handling isothermal streams that undergo change of phase using a disjunctive programming approach. On the problem of synthesizing water process networks, there has been significant work reported in the literature using both pinch (Wang and Smith²⁵) and mathematical programming approaches (e.g. Karuppiah and Grossmann²⁶), for reviews see Bagajewicz,²⁷ Bagajewicz and Faria,²⁸ Jezowski.²⁹ Since the pinch approach is restricted to problems with a single contaminant, the mathematical programming approaches have emerged as the preferred choice in water networks. These models aside from optimizing the cost have as major goal to minimize the consumption of freshwater. Ahmetovic and Grossmann³⁰ have recently developed a model that allows the handling of multiple sources of freshwater, recycle in units, and sources of sinks of water in a process, while allowing to control the complexity of the network by limiting the number of piping connections with 0–1 variables.

Finally, it should also be pointed out that systematic methods for synthesizing separation systems have also had a very important role to play in the design of sustainable chemical processes. At this point there are still very few papers that have reported the use of process synthesis techniques with the explicit incorporation of sustainability issues.³¹⁻³⁵ Some of them have applied optimization methods to the molecular design of solvents and the synthesis of the associated separation processes³⁶⁻³⁷ and more recently for the design of biorefineries as we show later in the paper³⁸⁻⁴¹ as well as integrating the different processes for the optimal operation of biorefineries.⁴²⁻⁴⁶

In this paper we review the design of sustainable biorefineries from different raw materials such as corn, first generation of bioethanol, lignocellulosic materials, second

generation of biofuels or cooking and algae oil, second and third generation of biodiesel. The study of these processes using a systematic approach based on mathematical programming techniques allows defining benchmarks for comparing different biofuels in terms of energy and water consumption so as to address concerns on sustainability of the production of alternative fuels. Furthermore, this approach also yields production and investment costs evaluating tradeoffs as well as evaluating the production of byproducts that may be of interest within the biorefinery complex such as fertilizers, hydrogen and glycerol.

2.-Background on biofuel production processes.

The history of the biofuels is linked to the automobile industry since the very beginning back in the 19th century. In 1876, Nicklaus Otto had already invented the internal combustion engine. Otto's engine mixed fuel and air before their introduction to the cylinder. A flame or spark was used to ignite the fuel-air mixture. The combustion engine was adopted by the automobile industry making use of ethanol as fuel. The first car produced in an assembly line, the ford Model T (1908-1927), can be also regarded as the first flexible fuel vehicle since it had an adjustable carburetor so that the car could be run on gasoline, ethanol or a blend. Furthermore, by the time the Diesel engine was patented in 1893, Rudolf Diesel stated, "The use of vegetable oils for engine fuels may seem insignificant today. But such oils may become in course of time as important as petroleum and the coal tar products of the present time".³⁸ In fact the diesel engine was originally conceived for the use of peanut oil. Biofuels are in fact gentler with the engines due to their cleansing or detergent effect resulting in cleaner filters, strainers and nozzles, which improve the combustion efficiency and also because of the absence of sulfur in the fuel. However, the ready availability of crude based fuels displaced the use of biofuels for decades, and the use of renewable resources was focused more on pulp and paper production from wood, saccharification of wood, nitration of cellulose for guncotton and viscose silk, production of soluble cellulose for fibers, fat curing, and the production of furfural for Nylon.

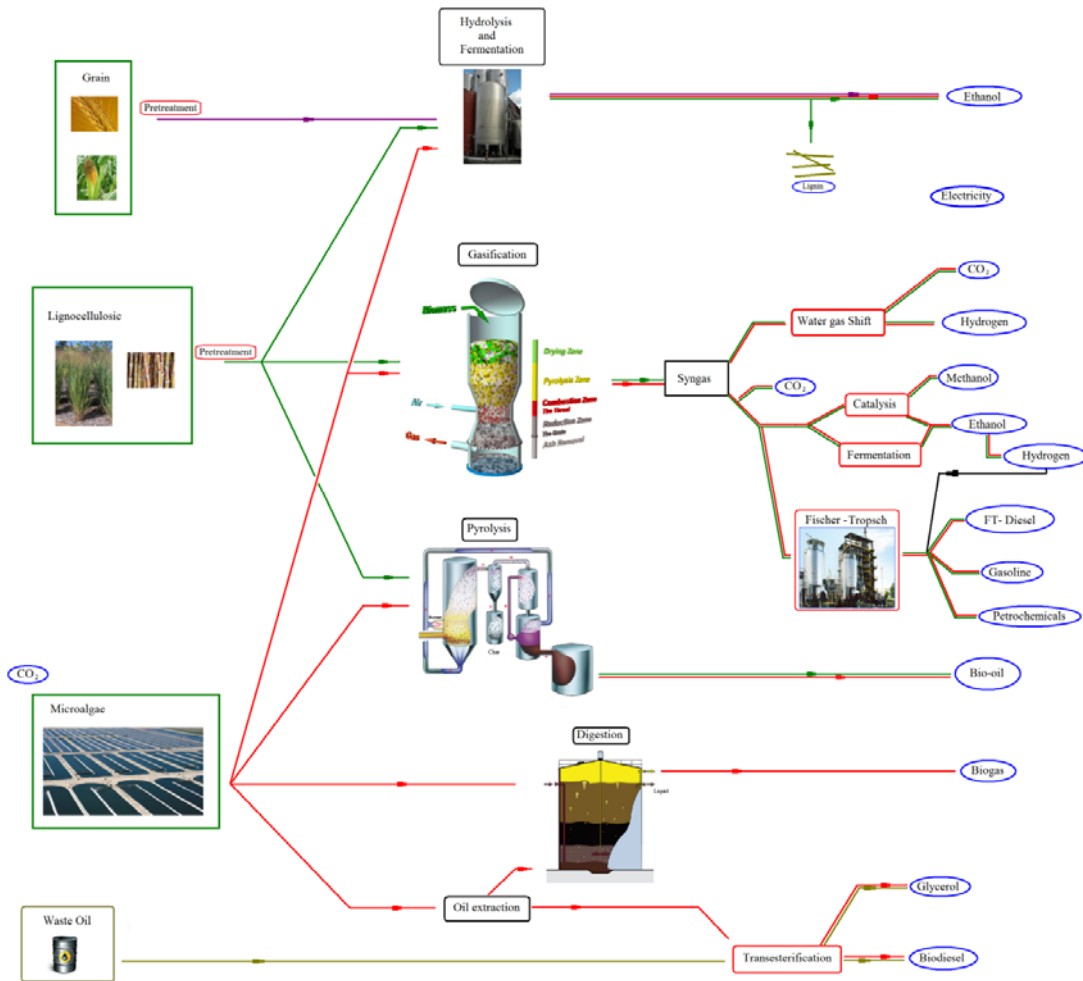


Figure 1.-Raw materials and technologies for production of biofuels

Nowadays, the increasing shortage of energy resources and the increasing demand and dependency on fossil fuels, as well as the growing concern about the environment, have led to consider alternative and renewable energy sources. Presently, the entire world is on a race for developing alternative energy resources which must be cheap, renewable and do not cause pollution, and whose emissions can be regarded as being neutral. In the case of the transportation sector, the most challenging one due to the need for high density energy sources, only biomass provides an alternative that can be implemented in the short-term.⁴⁷ Thus, bioethanol and biodiesel have become the most promising alternatives. Today's biorefinery technologies are based: (1) on the utilization of the whole plant or complex biomass, and (2) on integration of traditional and modern processes for utilization of biological raw materials. Figure 1 provides an overview of the different processing alternatives using biomass and waste as raw material and possible process integration. In

the next sections we present the evolution of the biosources of fuel and the effort towards reducing energy and water consumption for the production of ethanol, biodiesel and other biobased fuels from first, second and third generation of raw materials, as well as the contribution of systematic design to design the production processes.

3.-Synthesis of biofuel production processes.

3.1.-Corn and sugar cane based bioethanol: First generation bioethanol.

The production of ethanol from corn or sugar cane has been around for many years,⁴⁸ particularly in the US and in Brazil. In Brazil sugar cane accounts for three quarters of the feedstock used to produce ethanol and covers 50% of the country's transportation needs.⁴⁹ The production process from sugar cane is simple because once the sugar is extracted from the cane it can be directly fermented to obtain ethanol. Fermentation occurs with the addition of yeast and the ethanol is recovered through distillation and dehydration.^{50,51} The production of ethanol from sugar is limited to regions where sugar cane is widely available and easy to grow, and those are directly related to the proper climate and water availability. In the United States, alcohol fuel was produced in corn-alcohol stills until the production of ethanol was prohibited in 1919.^{52,53} Later, ethanol was used as a fuel during the WWII for domestic army vehicles. However, the low prices and availability of oil after the war made the government to abandon the use of ethanol. The use of ethanol came to light again in 1957 due to the production of a cheap sweetener, high-fructose corn syrup (HFCS), which is produced by the corn wet milling process. The prevalence of this sweetener in the market in 1974 generated a need for finding a market for the ethanol, which is a byproduct of this process. Currently only 5% of the ethanol produced follows the wet milling process while 95% is produced using the dry grind process.⁴

For quite some time corn based ethanol was deemed to have a negative net energy balance⁵⁴ and a vigorous debate took place between various authors and the USDA⁵⁵ on whether the production of corn-based ethanol was reasonable. Table 1 presents a summary of the values for energy consumption reported in the literature.

Table 1.- Energy consumption in corn-based ethanol plants

| Author (year) | Energy consumption (Btu/gal) |
|--|------------------------------|
| Pimentel (2001) ⁵⁶ | 75,118 |
| Keeney and DeLuca (1992) ⁵⁷ | 48,470 |
| Wang et al. (1999) ⁵⁸ | 40,850 |
| Shapouri et al. (2002) ⁵⁵ | 51,779 |
| Wang et al (2007) ⁵⁹ | 38,323 |

Karuppiah et al.³⁹ considered the energy optimization of the “dry-grind” process. In such plants, fuel ethanol is produced using corn-kernels as the feedstock. Fuel grade ethanol has to be very close to 100% pure before it can be blended with gasoline for its use in automobiles. However, conventional distillation columns produce an azeotropic mixture of ethanol and water (95% ethanol–5% water, % w/w), which has to be purified further for making fuel ethanol. The main challenge in the way of producing fuel ethanol commercially is that the process is very energy intensive, and requires large amounts of steam for use in the rectifiers to obtain an azeotropic mixture of ethanol and water, and requires the use of expensive molecular sieves to obtain 100% pure ethanol. Karuppiah et al.³⁹ developed a simplified model to predict the performance of the bio-ethanol flowsheet that includes grinding, scarification, fermentation, centrifugation and drying operations (see Fig. 2). A limited superstructure was also postulated in which some of the major alternatives include separation by molecular sieves and/or corn grits, and different ways to accomplish the drying for the dried grains solids, a by-product used as cattle feed. The objective was to optimize the flowsheet, determining the connections in the network and the flow in each stream in the network, such that the energy requirement of the overall plant is minimized while trying to maximize the yields. The MINLP optimization model without heat integration led to a decrease of the manufacturing cost from \$1.50/gal (base case) to \$1.36/gal. In the next step heat integration was considered. However, it became clear that the scope of heat integration was limited by the relatively low temperature in the fermentor. In order to improve the potential for heat integration the authors considered multi-effect distillation in the “beer” column and in the azeotropic column as alternatives for the optimization (see Fig. 2). This finally led to a 65% savings in steam consumption, leading to an energy consumption of 22,000 Btu/gal (including electrical energy) and cooling water with a cost reduction down to \$1.24/gal. Figure 6, which is shown later in the paper, shows the energy consumption and cooling needs of the process. This example

illustrates the potential for cost reduction in biofuel plants by using an optimization approach.

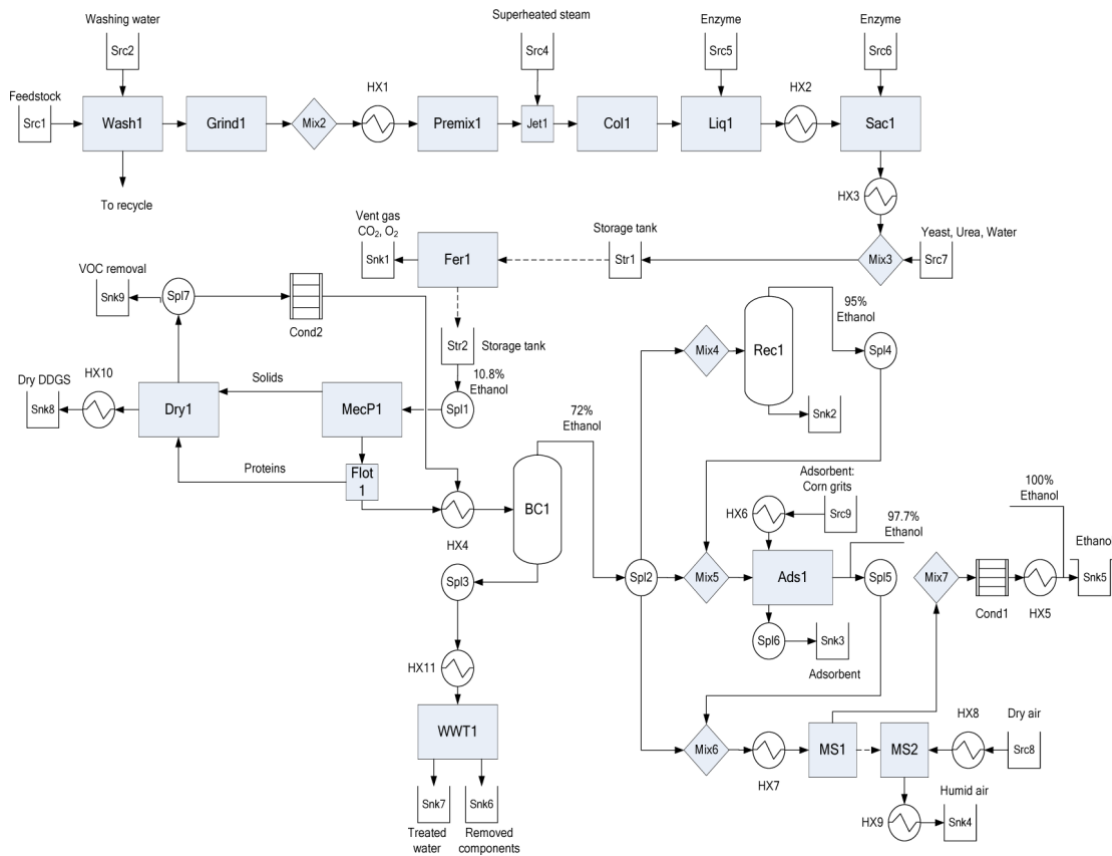


Figure 2.- Corn based ethanol production process

However, sustainability accounts for more than just energy consumption. Corn-based ethanol has been criticized not only for its energy balance, but also because of its high demand of water. The first data available in the literature regarding water consumption in ethanol plants reveal values from 3 to 15 gal_{water}/gal_{ethanol}.⁶⁰ Over the last decades there has been an improvement to reach the current industrial mean value for the newest plants of 3.4 gal_{water}/gal_{ethanol}.¹ Based on that, the suggested best possible water consumption for corn process is 2.85 gal_{water}/galethanol.^{60,61} By developing the optimum water network for the cases in which Karuppiyah et al.³⁹ optimized the energy consumption, it is worth pointing out that energy optimization plays a very important role in reducing the water consumption since the cooling needs are greatly reduced and so are the losses in the cooling tower. In this way, by coupling energy optimization and the design of optimal water networks, where waste water is treated and recycled, and using air cooling to partially substitute water as cooling agent, the water consumption in the corn-based ethanol

plant can be reduced down to only 1.17 gal_{water}/gal_{ethanol} as reported by Ahmetovic et al.⁶² see Fig. 7 later in the paper, which is lower than the data published in the literature while certifying the technical feasibility of the claims by the company Delta T, which has reported consumptions of 1.5 gal/gal.⁶³ Furthermore, the energy optimization and water network design also play an important role towards zero discharge of water achieving discharge values of 0.27 gal_{water}/gal_{ethanol}⁶⁴. However, better and cheaper wastewater technologies are needed to reach the goal of zero discharge. Figure 3 shows the water network for this example.

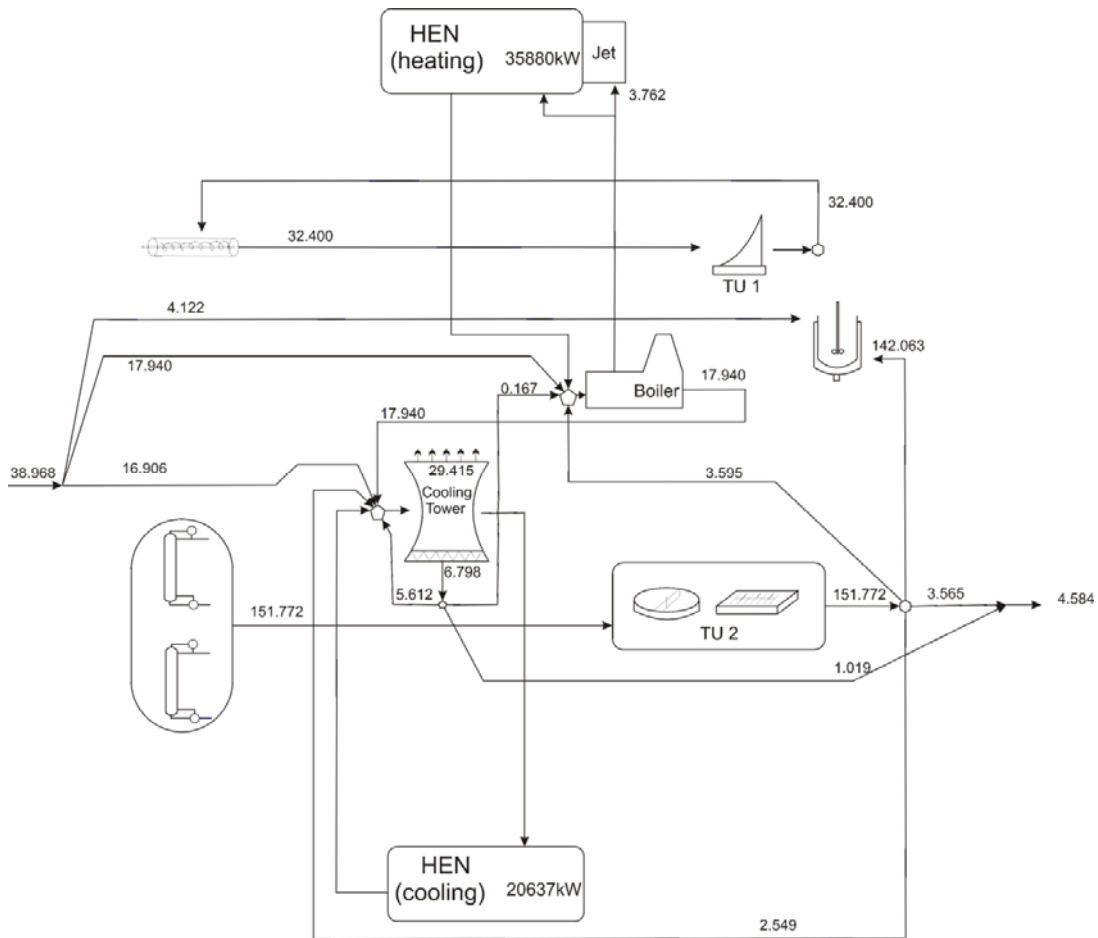


Figure 3.-Water network for the optimal production of corn base ethanol. Flows in t/h. TU 1: Solids removal. TU2: Secondary treatment for organics. HEN: Heat exchanger network.

3.2.- Lignocellulosic based biofuels

3.2.1.-Second generation of bioethanol

Corn based ethanol has the disadvantage that it competes with the food chain in terms of the land needed for its growth as well as in the final destination of the grain. Thus, the second generation bioethanol has focused on overcoming this disadvantage by using lignocellulosic materials whose yield (see Fig 4 ⁶⁵⁻⁶⁸) is higher than that using corn, especially switchgrass, and that have no footprint on the food supply chain. Among the wide spectra of lignocellulosic raw materials, the use of corn stover can be considered as a medium term case in which it is possible to take advantage of the already established corn industry, while the forest industry cannot be considered as a substitution for fuel in the long term, but only for the recycle and reuse of waste. Switchgrass, on the contrary, is a non food related lignocellulosic raw material that can be produced in non arable lands in most of the US territory with high yield to ethanol.

There are two paths to obtain ethanol from lignocellulosic raw materials, gasification or hydrolysis. So far detailed studies on the process from corn stover or hybrid poplar have been published, mainly by the NERL, for both paths using ASPEN as a process simulator.^{5,7,69-73} In general, the similarity between the hydrolysis path and the first generation of bioethanol together with the lower investment cost compared to the thermal-based process has attracted the attention of many researchers. Martín & Grossmann^{40,41} presented studies for gasification and hydrolysis of switchgrass based on superstructure optimization to evaluate a large number of alternatives in a systematic way using mathematical programming techniques.

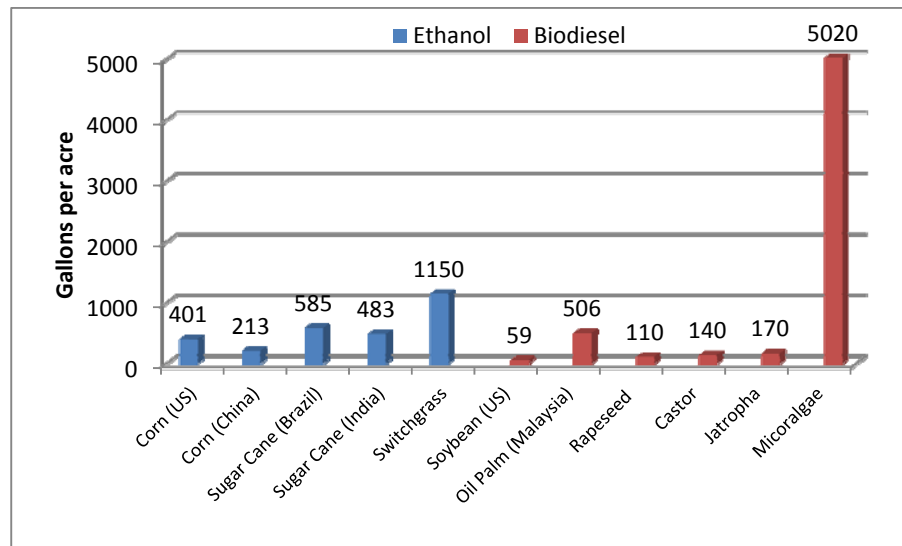


Figure 4.- Yield to ethanol and diesel form different raw materials⁶⁵⁻⁶⁸

a) Gasification

The NERL reports^{7,69} and some academic papers^{72,73} have evaluated the production of bioethanol from corn stover, wood chips or hybrid poplar through case studies using ASPEN as the simulation tool. Phillips et al.⁷ and He & Zhang⁷³ considered indirect gasification, which allows the use of air since the combustion takes place in a different chamber, and mixed alcohols synthesis. On the other hand Dutta & Phillips⁶⁹ and Piccolo & Bezzo⁷² evaluated the use of direct gasification, which requires oxygen to avoid the dilution of the syngas produced, but while Dutta & Phillips⁶⁹ selected mixed alcohols synthesis that takes place at high pressure and temperature allowing better energy integration, Piccolo & Bezzo⁷² decided on the use of syngas fermentation. The different assumptions make difficult the direct comparison from one study to the other. The only pilot plant at the moment, which is by Coskata⁷⁴ has selected gasification and syngas fermentation, while Abengoa is performing pilot plant studies on the biochemical process.⁷⁵

In order to evaluate all these alternatives in a systematic manner, and to avoid the use of raw materials that do not offer a promising future, Martín and Grossmann⁴⁰ developed the optimal conceptual design of the production process of 60 Mgal/yr ethanol from switchgrass by optimizing a superstructure that involves all the alternative designs considered so far plus a number of alternative cleanup technologies. The process consists

of four different parts: gasification (followed by gas cleanup), concentration adjustment, sour gases removal and ethanol synthesis and purification. Two alternatives are evaluated for gasification, indirect⁷ or direct.^{69,76} The gas obtained is treated using either steam reforming or partial oxidation to remove hydrocarbons, and subsequently it must be cleaned from solids as well as other compounds like NH_3 using either hot or cold cleaning. Next, the gas composition is adjusted to a CO/H_2 ratio of 1. Three technologies (bypass, membrane-PSA and water gas shift) are evaluated. Then, the removal of sour gases, CO_2 and H_2S , is required. Three alternatives, membrane separation, absorption in ethyl-amines and PSA are considered for this task. Once the syngas is prepared, two synthetic paths are evaluated: (1) high alcohols catalytic process with two possible distillation sequences (direct and indirect), and (2) syngas fermentation followed by four possible dehydration processes: distillation, water adsorption in corn grits, molecular sieves and pervaporation. The number of alternative designs is large, and thus systematic process design methods are a powerful tool to design the production process. The superstructure is modeled as an MINLP problem which is solved by partial enumeration of the integer variables in terms of gasification technologies, reforming modes and synthetic paths, generating 8 subproblems. For each of the subproblems the cleanup stages and separation processes are optimized to minimize energy consumption. Subsequently, multieffect columns and the design the optimal HEN are implemented in each of the subproblems. Finally, an economic evaluation to account for the contribution of hydrogen as byproduct, raw material consumption and utilities yields the flowsheet with lowest production cost that is shown in Figure 5. Figure 7 shows the energy consumption and cooling needs of the process.⁴⁰

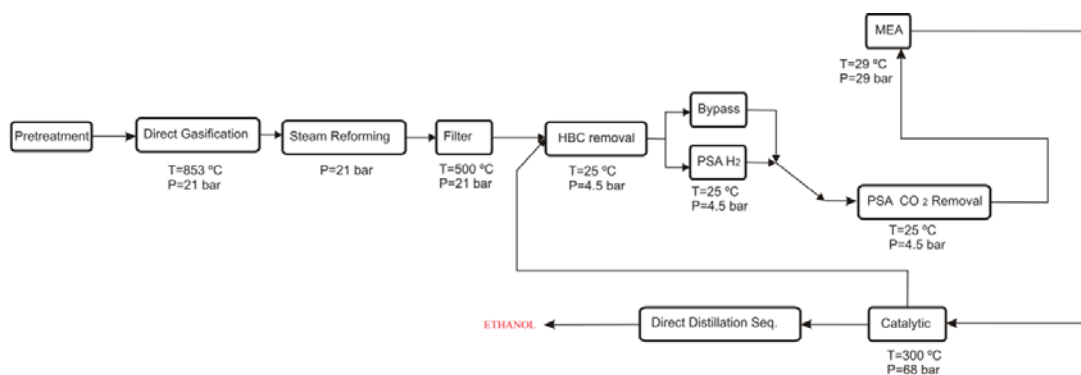


Figure 5. Thermo-chemical ethanol production from biomass

The most profitable process uses high pressure direct gasification, followed by steam reforming, which increases the production of hydrogen. The composition adjustment is carried out by removing the excess of hydrogen from the stream using PSA and membranes. Then sour gases are removed in two steps, PSA to remove CO₂ and MEA to get rid of H₂S. Finally, the catalytic path is selected followed by a direct distillation sequence. The facility for producing 60MMgal/yr of bioethanol generates 17 MW of energy and requires 70 MW of cooling. The production cost of this design turned out to be 0.41 \$/gal due to the contribution of hydrogen as byproduct and the investment for the plant is \$335 million. The fermentation path is not economically attractive due to the low concentration of ethanol in the reactor, which results in high consumption of energy to dehydrate the water-ethanol mixture. It is estimated that if the concentration of ethanol reaches values of 15%⁴⁰ this synthetic path becomes promising too. Several studies focus on increasing the concentration of ethanol in the fermentor by removing it from the liquid phase using adsorbents.⁷⁷

Even though the comparison of these results with the literature is not entirely consistent, it is still useful. For example, Phillips et al⁷ proposed the use of indirect gasification of lignocellulosic materials followed by steam reforming and high alcohols synthetic path reporting a price for ethanol of \$1.22/gallon (with a reduction down to \$1.01 /gallon due to byproduct credits) with an investment of \$190 million for 2000 MT/day of dry biomass producing 60MMgal/yr of ethanol. He & Zhang⁷³ reported 0.19€/L also for the indirect gasification and autoreforming scenario. On the other hand, Dutta and Phillips⁶⁹ reported a price of \$1.95/gallon for the use of direct gasification followed by steam reforming and high alcohols synthesis with an investment of \$254 million for processing 2000 MT/day of dry biomass to produce 60MMgal/yr of ethanol. The use of fermentation of the syngas has received industrial and academic attention, and Huhnke⁷⁸ reported the production of ethanol via gasification–fermentation at \$1.2 /gal, while Piccolo and Bezzo⁷² reported 0.65 €/L. The Coskata process,⁷⁴ based also on the fermentation of syngas, claims production costs under \$1 /gallon for a pilot plant production scale, but none of these processes considers the possibility of obtaining hydrogen as byproduct.

The production process of ethanol from switchgrass via gasification requires a large amount of water in the form of cooling water, due to the high pressures and temperatures in the entire process, and in the form of steam to perform the gasification. Values of 5.9-

9.8 gal_{water}/gal_{ethanol} have been reported in the literature when using switchgrass as raw material² (Wu et al, 2009), or 2 gal_{water}/gal_{ethanol} from hybrid poplar.⁷ Due to the high cooling needs, some authors support the implementation of air cooling technologies to substitute part of the use of cooling water.⁷ Making use of this technology after the energy optimization and heat integration, Martín et al.⁶⁴ presented the fact that it is possible to reduce the cooling water use to a total freshwater consumption below 1.5 gal_{water}/gal_{ethanol}. This value also accounts for the production of a significant amount of hydrogen which is produced in part due to the decomposition of steam. Discounting the water consumption due to the co-production of hydrogen in Fig. 8 the water consumption for the production of ethanol reveals a value of only 0.65 gal/gal.⁶⁴ There is no water discharge because the large amount of water circulating within the process allows enough dilution of the total dissolved solids (TDS) and reuse of the stream.

b) Hydrolysis

To produce ethanol from lignocellulosic raw material another route possible is the hydrolysis of the biomass. In order to pretreat switchgrass to expose the hemicelluloses and cellulose for further treatment, two methods have been found to be competitive for the industrial production of ethanol due to the high yield towards the liberation of cellulose and hemicelluloses from the matrix of the plant: (1) dilute acid (H₂SO₄) pretreatment^{70,72,79,80} and (2) ammonia fibre explosion (AFEX).^{71,81-83} Most of the papers either study the pretreatment, mainly from an experimental point of view,^{79,81-83} or deal with the production of ethanol from the liberated sugars.^{72,80} The most complete studies are the ones produced by the NREL,^{70,71} where using a scenario based approach, they analyze the production of ethanol from corn stover.^{70,71} Even though this raw material is interesting as a bridge between first and second generation of bioethanol, the use of a hydrolytic path is sensitive to the composition of the lignocellulosic biomass, and thus it is not easy to apply it to any other raw material. Switchgrass is a promising lignocellulosic raw material in the US due to the production capacity in US soil. From the industrial point of view, currently Abengoa⁷⁵ is testing the hydrolytic path for the production of bioethanol at large scale in the US in their facility at Salamanca in Spain.

To evaluate different pretreatment and dehydration options, Martín & Grossmann⁴¹ proposed an optimal conceptual design for ethanol production via hydrolysis of switchgrass

by postulating a superstructure that embeds both pretreatment alternatives (AFEX and dilute acid) together with hydrolysis of the biomass, fermentation of the sugars and four technologies for the dehydration of ethanol (rectification, adsorption using corn grits, molecular sieves and pervaporation). By solving the MINLP model, the optimal flowsheet uses dilute acid pretreatment, which is cheaper and more environmentally friendly since it consumes less energy and requires less cooling water. The process consists of pretreating the switchgrass to reduce the particle size and break the physical structure. Once the physical structure of the switchgrass has been broken to allow the contact between the polymers and the enzymes, hydrolysis of the polymeric sugar takes place. This process is carried out in stirred tank reactors at 50 °C where the accessible cellulose and hemicellulose are broken into fermentable sugars.^{72,80,84-86} The sugars, mainly glucose and xylose, are fermented in water into ethanol. The reactions are different in terms of yield and velocity. The optimal temperature is 38 °C so that both are fermented at the same time. A number of different products are obtained together with ethanol such as different acid products of the metabolic paths of the microorganisms used (*Z mobilis* bacterium).^{72,80,86} The purification stages consist of the removal of solids, lignin and cells, from the liquid slurry coming out of the fermentor. The lignin is used to obtain energy for the process. Finally, ethanol is dehydrated by means of a beer column followed by molecular sieves to fuel grade quality. Next, heat integration is performed. Figure 6 shows the flowsheet from Martín & Grossmann⁴¹ while Figure 7 presents the energy consumption and cooling needs of the process.

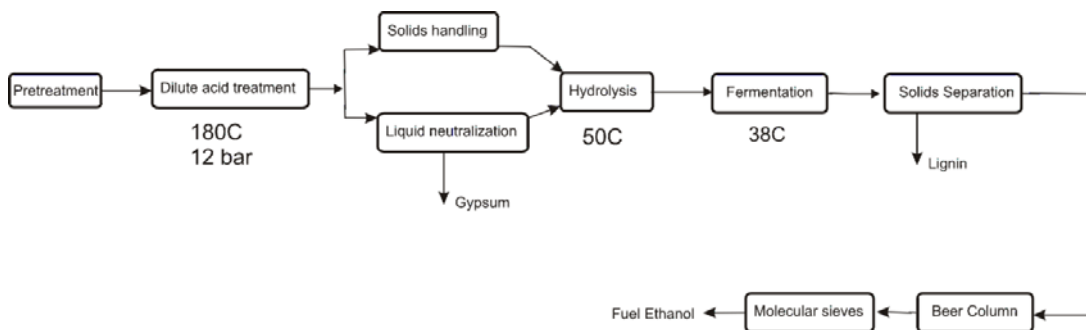


Figure 6.- Hydrolysis based production process of ethanol from switchgrass

The production cost reported in the literature for the acid/enzymatic hydrolysis process by NREL is \$1.33 /gal from corn stover with an investment of \$200 million for 2000 TM/day of dry biomass producing 60MMgal/yr of ethanol⁷⁰ while others are more

optimistic aiming at values lower than \$1.10 per gallon ethanol.⁷⁸ However, a recent study by Kazi et al.⁷¹ reports a production cost much higher than the ones in the literature based on the different price for the feedstock and the assumptions in the model (e. g. conversions, yield). The estimate of the current commercial scale for lignocellulosic materials is at \$2.43 /gal with an investment of \$156-\$209 million for installed equipment and a total capital investment of \$327-\$501 million for 2000 MT/day of dry biomass to obtain 60MMgal/ty of ethanol. In Martin & Grossmann's study⁴¹ a production cost of \$0.8/gal is reported with an investment cost of \$169 million for the same production rate.

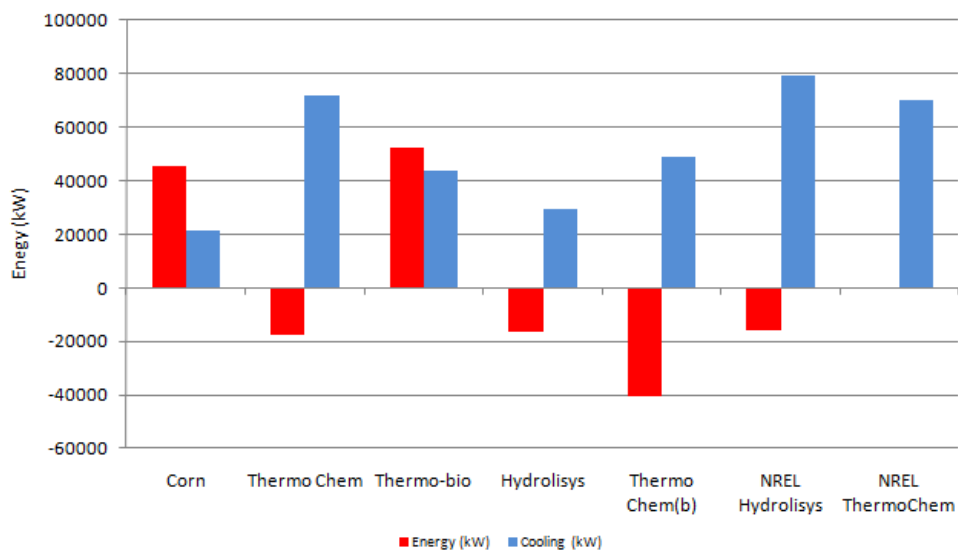


Figure 7.- Energy consumption and cooling needs for the ethanol production processes.

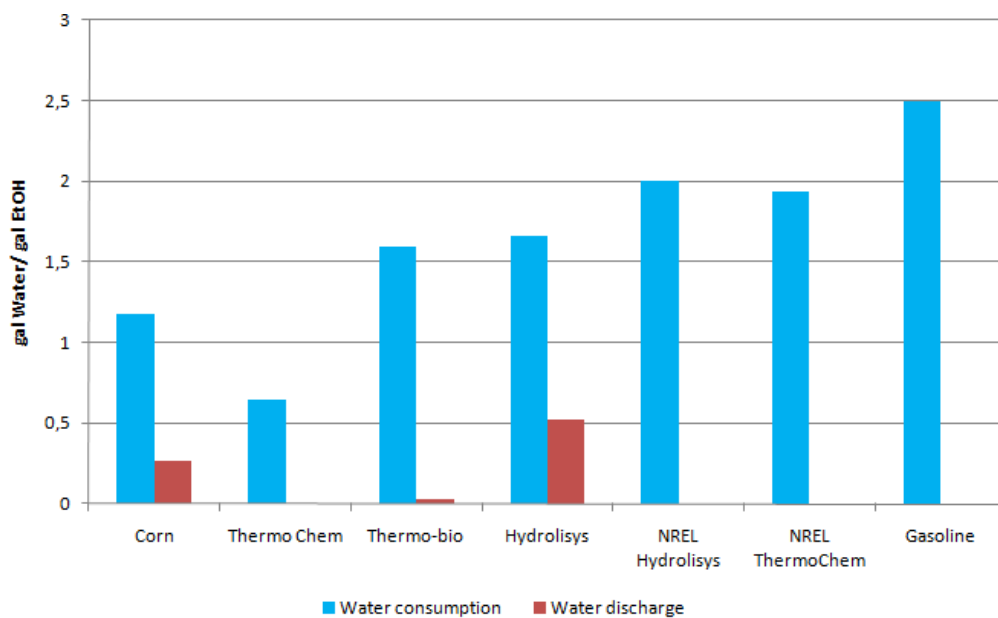


Figure 8.- Water consumption ethanol production processes.

The production of ethanol from hydrolysis is a more gentle process in terms of operating pressures and temperatures compared to the gasification process resulting in less than half the cooling requirements for the thermo-chemical process, (see Figure 7). However, the lower temperatures prevent from an extensive use of air cooling to substitute water as cooling agent, while the exothermic fermentation at 38°C prevents from good energy integration. The results in the literature show values of 2 gal_{water}/gal_{ethanol}.⁶⁰ By designing the optimal water network,⁶⁴ the total consumption of freshwater turns out to be 1.66 gal_{water}/gal_{ethanol} (see Fig. 8) and wastewater is discharged, 0.52 gal_{water}/gal_{ethanol}, since the lower flowrates in the water network do not allow TDS dilution and the high cost of removing TDS results in discharging water instead of treating it.

3.2.2.- FT-diesel and green gasoline

Not only bioethanol can be produced from lignocellulosic materials but also diesel or hydrogen. The history of the Fischer-Tropsch synthesis can be traced back to the beginning of the 20th century, when in 1902 Sabatier and Senderens discovered that CO could be hydrogenated over Co, Fe and Ni to methane. Later in 1925 professor Franz Fischer, founding director of the Kaiser-Wilhelm Institute of Coal Research in Mülheim an der Ruhr, and Dr. Hans Tropsch reported synthesis of hydrocarbon liquids and solid paraffins on Co-Fe catalyst under mild conditions of 250-300°C. Fischer-Tropsch technology was extensively developed and commercialized in Germany during World War II when it was denied access to petroleum-rich regions of the world. Likewise, when South Africa faced a world oil embargo during their era of apartheid, it employed Fischer-Tropsch technology to sustain its national economy. Fischer-Tropsch liquids can be refined to various amounts of renewable (green) gasoline, diesel fuel, and aviation fuel depending upon selected process conditions. Depending on the types and quantities of Fischer-Tropsch products desired, either low (200–240 °C) or high temperature (300–350 °C), and synthesis at pressures ranging between 10 to 40 bar, are used with either cobalt or iron based catalysts.⁸⁷ Despite the extensive work in Fischer-Tropsch technology using coal, not much work has been reported for the use of lignocellulosic raw materials. Swanson et al.¹⁰ presented a simulation based study using ASPEN process simulator for the production of FT – diesel from the gasification of corn stover, syngas treatment, Fischer-Tropsch synthesis and hydroprocessing. The plant requires \$300MM of installed cost (2000 MT/day of dry biomass) and produces FT-diesel at \$4/gal.

Martín and Grossmann⁸⁸ proposed a superstructure embedding alternative technologies for the optimization of the production of FT-diesel from switchgrass. The process starts with the gasification of the biomass. Two different alternatives are evaluated, direct and indirect gasification. The gas obtained is reformed, cleaned up and its composition may be adjusted in terms of the ratio CO/H₂ for the optimal production of diesel fraction using up to three possible technologies (bypass, PSA and water shift). Next, the removal of CO₂ and H₂S is performed by means of two clean up processes such as absorption in ethyl-amines and PSA. Then the Fischer-Tropsch reaction is conducted and the products are separated. Hydrocracking of the heavy products is also considered to increase the yield towards diesel. Again, a number of alternative processes and trade-offs makes it difficult to propose a flowsheet without the help of a systematic approach. The optimization of the system is formulated as a Mixed-integer Non-linear Programming (MINLP) problem where short cut models, reduced order models, design equations and mass and energy balances are used for the different units involved in the production process with special focus on the FT reactor, the hydrocracking unit and the CO/H₂ adjustment. The MINLP is solved for the optimal production of the biodiesel fraction while minimizing the energy consumption. Energy integration and an economic evaluation are also performed.

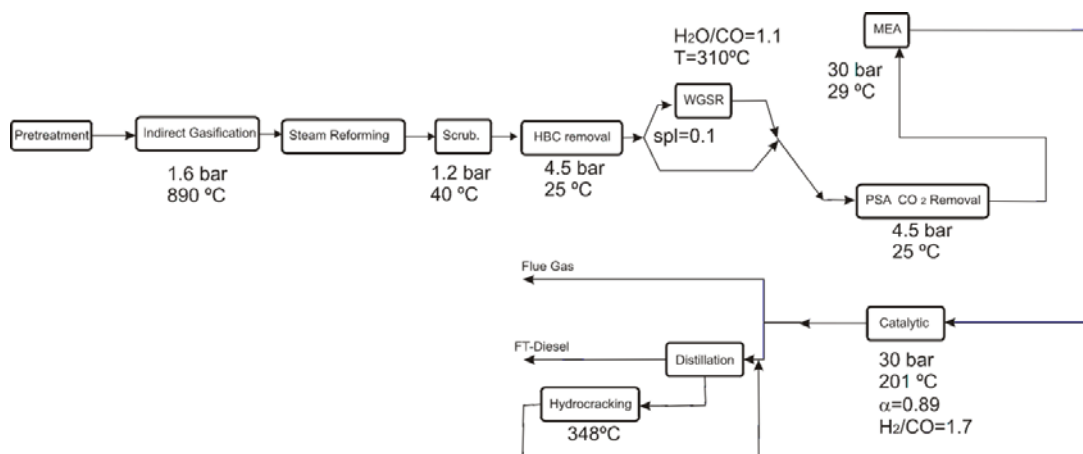


Figure 9.- Optimal flowsheet for the production of FT- Diesel.

The optimal solution requires the use of indirect gasification followed by steam reforming. The ratio CO/H₂ is slightly modified to match the experimental minimum, while adjusting the temperature of the FT reactor and of the hydrocracker to increase the biodiesel production results in a promising production cost of 0.73 \$/gallon and an

investment cost of \$216 million for producing 60MMgal/yr of biofuels (green gasoline and diesel). Figure 9 shows the optimal flowsheet. For this design the consumption of water can be as low as 0.15gal/gal as long as air cooling is used together with water treatment, recycle and reuse.

3.2.3.-Hydrogen production

The syngas obtained from biomass is an interesting building block for a number of chemicals. In this review we do not describe the production of high value products like fine chemicals or polymers, but we focus on hydrogen. Hydrogen is a clean and renewable source of energy with the highest gravimetric energy density of any known fuel with the advantage of zero carbon emissions that can be used for fuel cell powered vehicles, or as an intermediate needed in the production of crude oil-based chemicals.⁸⁹⁻⁹¹

Hydrogen can be produced by generating syngas via gasification, cleaning up of the gas and shifting the energy value of the CO to H₂ using the water gas shift reaction (WGSR).⁹²⁻⁹⁴ Recent studies have evaluated the production of hydrogen from gasification of biomass using a dynamic simulation approach⁹⁵ or steady process simulation using ASPEN or HYSYS⁹⁶⁻⁹⁹ in which the process technologies are fixed upfront in terms of gasification, either direct gasification^{95,96} or indirect gasification,^{97,98} steam reforming, gas clean up using PSA/scrubbers and water gas shift reaction⁹⁵⁻⁹⁸. The production costs reported in the literature from tree forest biomass in Western Canada are \$1.14/kg of H₂¹⁰⁰ while the NERL obtained values in the range of \$1.18 –\$ 1.78 /kg⁹⁷ and the only value they obtained below \$1/kg resulted from assuming zero cost for the raw material. Lau et al.⁹⁶ obtained values from \$0.65/kg - \$1.33/kg for switchgrass depending of the plant size and similar values for other raw materials such as bagasse (0.75-1.50\$/kg) or nutshell (0.90-1.33\$/kg). For the near future the DOE suggests a price of \$1.58 /kg and in the long run this price is expected to decrease to \$1.10/kg with the corresponding decrease in the investment from \$150Million to \$110 Million for treating 2000 ton/day of dry biomass.⁹⁸ In order to reduce the current production cost, a new reactor design, capable of separating the hydrogen produced through a permeable membrane has been proposed.^{95, 101-104}

Martín and Grossmann¹⁰⁵ coupled the newly developed reactor design using membrane technology⁹⁵ with two different gasification technologies, direct and indirect

gasification, and two reforming modes, partial oxidation or steam reforming creating a superstructure formulated as an MINLP. The tradeoffs to be resolved are that indirect gasification can use air and consume less steam but produces more hydrocarbons than the direct one, while steam reforming is endothermic and partial oxidation is exothermic. The operating conditions in the gasifiers and at the WGSR are optimized for hydrogen production in each of the four alternative technologies. Next, energy is integrated. Finally, an economic evaluation is performed to determine the production cost. It turns out that indirect gasification with steam reforming is the preferred technology providing higher production yields ($0.13 \text{ kg/kg}_{\text{dryBiomass}}$) than the ones reported in the literature for hydrogen from natural gas and at a lower and promising production cost of $0.68 \text{ \$/kg}$ with an investment cost of $\$148 \text{ million}$. Figure 10 presents the block flowsheet diagram for the process. The disadvantage of using biomass to obtain hydrogen is that the biomass fixes carbon from the atmosphere, and thus it should be considered as a source of carbon too, not only a source of hydrogen. This fact can be alleviated if we inject the CO_2 generated in the ponds or photoreactors for the production of microalgae.

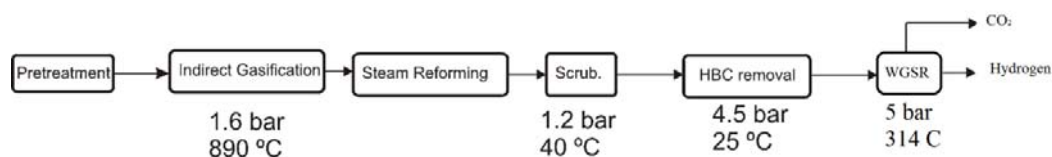


Figure 10.- Optimal flowsheet for the production of hydrogen from biomass

3.3.-Oil based biofuels

Many researchers have concluded that vegetable oils hold promise as alternative fuels for diesel engines.^{106,107} However, using raw vegetable oils for diesel engines can cause numerous engine-related problems.¹⁰⁸ The increased viscosity, low volatility, and poor cold flow properties of vegetable oils lead to severe engine deposits, injector coking, and piston ring sticking.^{109,110} Thus, research has focused on developing transformation products like pyrolysis, micro-emulsion and transesterification. The process of transesterification has been the most widely used. It removes glycerol from the triglycerides and replaces it with radicals from the alcohol used for the conversion process.¹¹¹ This process decreases the fuel's viscosity but maintains the cetane number and

heating value. The monoesters produced by transesterifying vegetable oils with alcohol are known as *biodiesel*.^{112,113}

3.3.1.-Raw materials

a) Vegetable oils: First generation of biodiesel.

Biodiesel is obtained using vegetable oils such as sunflower, cottonseed oil, rapeseed oil, soybean oil, palm oil, peanut oil and canola oil as raw materials.^{114,115} Their use is distributed across the globe depending on the production capabilities of different countries. For example, Canola is the preferred one in Canada, cottonseed oil is abundantly produced in Pakistan, palm oil is frequently used in Malaysia, while soybean with 56% of the world's oilseeds represents the biggest oilseed crop produced. However, biodiesel can be twice as expensive as crude based diesel (biodiesel from soybean is estimated around 2-2.5 \$/gal) but the capital investment for a biodiesel plant is far lower.¹¹⁶ Moreover, the competition with the food chain and the cost of the raw material is directing the focus to the use of alternative sources of oil.

b) Cooking oil based diesel: Second generation of biodiesel.

Among oils, waste cooking oil is a promising alternative to vegetable oil for biodiesel production because it is much less expensive than pure vegetable oil. Waste oils have been traditionally sold commercially as animal feed. However, since 2002 the EU has enforced a ban on feeding these mixtures to animals, because, during frying, many harmful compounds are formed. The high temperatures during frying (from 160-200 °C) cause major physical and chemical changes to the oil, which differs from oil to oil, depending on their composition. Basically three types of reactions occur during frying: thermolytic, oxidative, and hydrolytic which result in changes in the vegetable oil such as: (i) an increase in the viscosity, (ii) an increase in the specific heat, (iii) a change in the surface tension, (iv) a change in color, and (v) an increase in the tendency of fat to foam. As a combined result of all these chemical reactions, many undesirable compounds are formed, increasing the polar fraction and preventing the use of waste cooking oil as an additive to feeding mixtures for domestic animals because it could result in the return of harmful

compounds back into the food chain through the animal meat.¹¹⁷ Hence, the waste cooking oil must be disposed of safely, or be used in a way that is not harmful to human beings.

The quantity of waste cooking oil generated per year is huge.¹¹⁷ The disposal of waste cooking oil is problematic because disposal methods may contaminate the water. Therefore, many developed countries have set policies that penalize the disposal of waste oil through the drainage. Therefore, the production of biodiesel from waste cooking oil is one of the better ways to reuse and dispose it efficiently and economically obtaining added value from dangerous wastes.¹¹⁸⁻¹²⁰ However, the high demand of diesel fuel and the availability of waste cooking oil^{8, 117, 121,122} indicates that biodiesel from cooking oil cannot replace diesel fuel, but it can at least contribute to reducing the dependency of crude oil based diesel. The properties of the biodiesel from waste cooking oil would be largely dependent on the physicochemical properties of these feedstocks.

3.3.2.-Production process of biodiesel from oil.

Biodiesel is obtained via transesterification of oil with alcohols. The yield of the reaction depends on a number of parameters such as reaction temperature and pressure, reaction time, rate of agitation, type of alcohol used and molar ratio of alcohol to oil, type and concentration of catalyst used, and concentration of moisture and free fatty acids (FFA) in the feed oil. Methanol is the most widely used alcohol because of its low price, but ethanol has also been tested. There are five main alternatives to perform the transesterification of the oil towards biodiesel depending on the catalysts used: homogeneous acid-catalyzed, alkali-catalyzed, heterogeneous (acid or basic), enzymatic and no catalyzed under supercritical conditions. The alkali-catalyzed reaction is limited because of the formation of soaps between the catalysis and the free fatty acids (FFA) and the negative effect of the presence of water in the oil by favoring saponification although the reaction is quick. The acid catalyzed reaction is not limited by the purity of the reactants but by the reaction time, which is around 4 days. The enzyme catalyzed reaction is insensitive to water and FFA, and it is easier to purify the products. However, the catalyst is more expensive and its conversion is lower than the previous two processes. Heterogeneous catalytic processes are a promising alternative due to the simplified purification stages. Finally, it is also possible to transesterify the oil with supercritical

methanol. Although the yield of methyl ester is high, the molar ratio of methanol to oil is high (1:42), and the operating conditions are extreme (350°C and 45 MPa).^{8, 117, 122-130}

A number of authors have developed and evaluated the production process based on those technologies from a technical and economical point of view following a case study based simulation approach using ASPEN or HYSYS.^{8,9, 124, 130-139} The use of heterogeneous catalyzed processes (enzymatic, basic or acid based) or supercritical based processes are gaining support due to the reduced separation stages resulting in a very competitive prices.^{9,136,138} which compete with the previously denoted as most economical, the acid catalyzed process, because it is less affected by the impurities of the raw material reducing the purification pretreatment stages.^{8,131} The range of investment and production cost reported in the literature is large due to the different plant sizes considered in the studies and the individual costs and assumptions. Even though, we find interesting to present some results as benchmark. The investment cost for the production of bio diesel is around \$7 million for 36,000 MT/year¹²⁴ to \$8.5 to 27 million for 8,000 MT/yr to 200,000 MT/yr¹³⁸ with production costs of \$0.5/kg¹²⁴, \$0.63/kg⁹ or \$0.74/kg^{8,130} for a 8,000 TM/yr for the best catalytic process in each of those studies, 0.05-2.38€/kg for the enzymatic case depending on the cost of the enzyme¹³⁸ or \$0.26/kg for the supercritical process, for a production capacity of 80,000 Ton/yr.¹³⁶ Furthermore, the production of biodiesel is less water intense than bioethanol, consuming around 1 gal/gal.¹⁴⁰

However, the recycle of methanol and the number of variables involved in the operation of the reactor indicates that a systematic study may yield interesting results in terms of energy and water consumption. Recently, Martín and Grossmann¹⁴¹ have simultaneously optimized the production of biodiesel in terms of technology (homogeneous alkali and acid catalyzed, heterogeneous enzymatic or basic and non catalyzed under supercritical conditions) and operating conditions (using surface response models for the reactors), and performing simultaneous optimization and heat integration at the process flowsheet using Duran & Grossmann's approach.²³ The model was formulated as a MINLP where each of the flowsheets was simultaneously optimized and heat integrated, see Figure 11. The result is that for cooking oil the heterogeneous catalyzed reaction is the best process yielding a production price of 0.66\$/gal, with an energy consumption of 1.94 MJ/gal (half the best estimates) and the water consumption is 0.33 gal/gal of biodiesel, almost a third of the one reported in the literature.¹⁴⁰

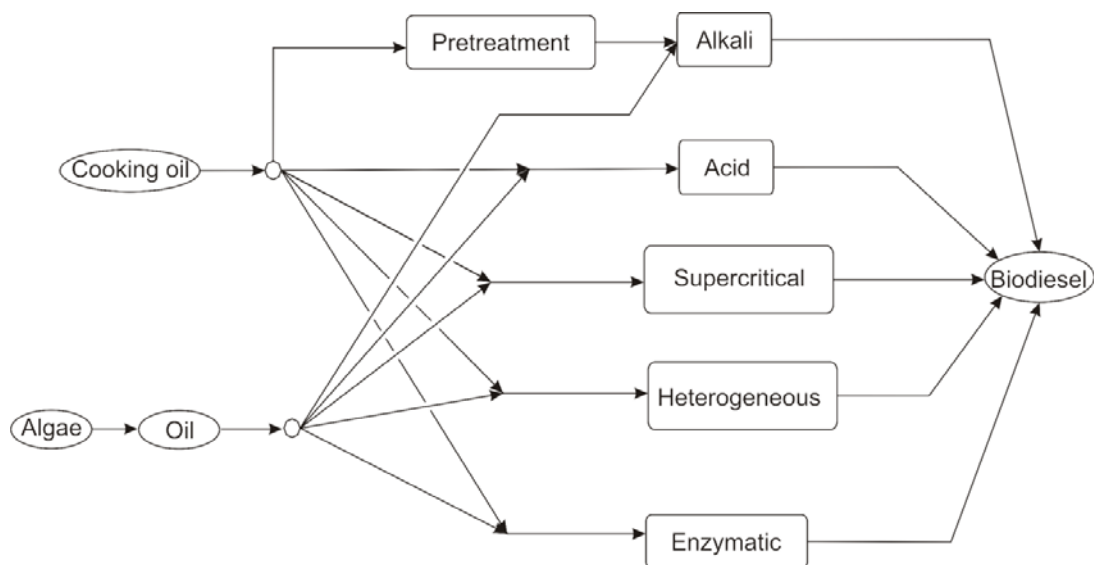


Figure 11.- Superstructure for the optimal production of biodiesel from oil

3.3.3.-Glycerol: Valuable byproduct.

The byproduct of the transesterification of oil is glycerol. Due to the expected increase in the production of biodiesel, research has focused on the use of glycerol to produce different added value chemicals to improve the economic balance of biodiesel production.^{123, 142-149} For instance, it is possible to synthesize *1,3-propanediol* which can be used in composites, adhesives, laminates, powder and UV-cured coatings, mouldings, novel aliphatic polyesters, co-polyesters, solvents, anti-freeze and other end uses¹⁵⁰, *1,2 propanediol*, a major commodity chemical with an annual production of over 1 billion pounds in the United States,¹⁵¹ *dihydroxyacetone*, used in cosmetics industries as a tanning agent,¹⁵² *succinic Acid* that can be used for the manufacture of synthetic resins and biodegradable polymers and as an intermediate for chemical synthesis,¹⁵³ polyglycerol esters which find their utilization as antifogging and antistatic additives, lubricants, or plasticizers,¹⁵⁴ as well as *polyesters*, *polyhydroxyalkonates*.¹⁵⁵ However it is also possible to obtain H₂ or syngas from the reforming of glycerol^{149,156-159} that can be used as raw material for other biofuels or chemicals.

3.4.-Algae based biofuels.

Microalgae are also a source of biomass with great potential. The algae convert sunlight, saline water, nutrients and CO₂ into proteins carbohydrates and lipids with a growth rate that doubles their biomass up to five times a day. Subsequently, growth is stopped by limitation of the nutrient so that lipids are produced. Algae can grow not only on normal carbon sources, such as glucose, fructose, etc, but on waste from agriculture and food industries, and using saline water or wastewater, thus lowering the cost of microalgae oil while it can also be a good for water treatment.¹⁶⁰ Next, the algae are harvested to eliminate the water that accompanies them, which can be recycled, using either flotation or settling (helped by flocculation), centrifugation or filtration. Finally, the oil is extracted and either transesterified (using the same processes as for any other oil), or it can be catalytically converted into gasoline.¹⁶¹ Microalgae oils are believed to be a promising feedstock for biodiesel production since the oil they generate has a fatty acid composition similar to that of vegetable oils.^{160,162} In order to produce a fair amount of oil, microalgae must be carefully selected so that they are capable of producing large quantities of lipids while being tolerant to fluctuation in the operating conditions.

The main problem with producing biodiesel from algae is that to make it commercially viable, the algae need a concentrated and plentiful source of CO₂, and furthermore it is necessary to reduce the high harvesting costs.¹⁶³ The current microalgae oil price is 0.25 \$/lb but it could be as low as 0.07\$/lb.¹⁶³ However, certain processes for the production of ethanol, hydrogen or FT-diesel via gasification generate a fair amount of CO₂ that can be used for this process as well as power facilities. Furthermore, new technologies are in development to reduce the harvesting costs of microalgae.¹⁶⁴ The potential yield of biofuel from microalgae is one or two orders of magnitude higher than with any other crop and 5 times larger than the best yield switchgrass as seen Fig. 4. The use of microalgae as feedstock for the production of biodiesel has been sponsored by the US Department of Energy. It is reported that microalgae can be produced using salt water (eliminating the problem of water usage) and that with 1 to 3 million acres, about 2-5% of the cropland used currently in the US, it would be possible to meet the US diesel needs. Furthermore, the production of diesel from algae could be achieved at a lower cost than the current one for diesel.¹⁶⁵

In the study by Martín and Grossmann¹⁴¹ the oil from algae can be produced at \$0.065/lb as long as the new technology released by Univenture¹⁶⁴ is implemented and operates as claimed. Next a MINLP involving five different technologies (homogeneous alkali or acid catalyst, heterogeneous enzymatic or basic catalyzed and under supercritical conditions) is solved to determine the best production process among the five alternatives commented before, homogeneous acid or alkali catalyzed, heterogeneous enzymatic or basic and non catalyzed under supercritical conditions, simultaneously optimizing and heat integrating each process. For this type of oil the best process is the alkali catalyzed with a production cost of 0.42 \$/gal requiring 1.94 MJ/gal of energy and 0.60 gal/gal of water. The second best process is quite close, only \$0.02/gal more expensive and is the heterogeneously basic catalyzed, which may be selected in order to have a flexible process capable of processing cooking oil or algae oil.

The potential of the microalgae is not limited to the use of the oil they generate, but they can also be used to obtain ethanol by fermenting the starch and cellulose contained in them, hydrogen by gasification or biological conversion, liquid fuels by pyrolysis, or thermal liquefaction and methane by digestion or high value products.¹⁶⁶⁻¹⁶⁸ It is also possible to use the oil for biodiesel production while the residues are used to obtain ethanol via fermentation.¹⁶⁹⁻¹⁷⁰

4.- Biorefineries.

The chemical process industry often constructs large integrated production sites, namely integrated chemical complexes¹⁷¹⁻¹⁷³ that are composed of many interconnected processes and a number of chemicals. The operation of these complexes is based on exploiting the synergies of vertical integration, reuse of byproducts, and energy integration among processes. The National Renewable Energy Laboratory (NREL) has defined a biorefinery as a facility that integrates biomass conversion processes and equipment to produce fuels, power, and chemicals from biomass. Therefore, biorefineries also represent networks of this kind (see Figure 12) that are capable of producing a wide variety of products from fuels to chemicals or even energy.^{167, 174-176}

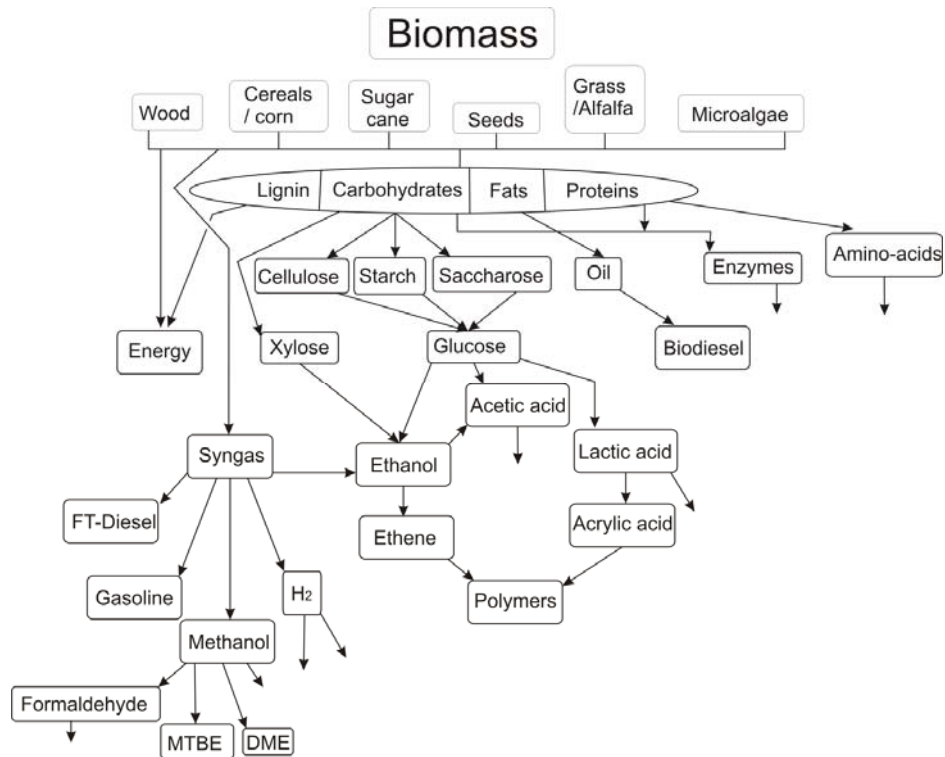


Figure 12.- Biorefineries as integrated sites

To evaluate the integration of the processes, we first need to study them separately to identify synergies. Table 2 shows the summary of the economics of the different second and third generation biofuel processes and their byproducts based on lignocellulosic switchgrass, cooking oil and algae. As it can be seen, there are a number of tradeoffs in terms of investment versus production cost. Furthermore, most of the lignocellulosic based processes produce energy, as well as byproducts such as hydrogen, a mix of alcohols and CO₂ or green gasoline that can be used as fuel. On the other hand, biodiesel requires energy and CO₂, in the case when microalgae are used to obtain the oil, while producing a series of byproducts such as fertilizers or glycerol.

Up to date, three types of biorefineries have been defined as phase I, II and III. The phase I and II use grain (corn and wheat) as feedstocks, the only difference is that phase I produces a fixed amount of ethanol and other products with fixed processing capabilities based on the corn dry milling process, while phase II has the capability of producing a number of products based on the corn wet milling process. The phase III biorefinery combines whole crop and lignocellulosic materials.¹⁷⁷

Table 2.- Summary of the main features of the optimized processes^{40,41, 88, 105, 141}

| | Ethanol (Hydrolysis) | Ethanol (Gasification & Catalysis) | Ethanol (Gasification & Fermentation) | FT- Diesel | Hydrogen | Biodiesel (Cooking) | Biodiesel (Algae) |
|---------------------------------------|---------------------------|---|--|--|---------------------------|------------------------|------------------------|
| Total investment (\$MM) | 169 | 335 | 260 | 216 | 148 | 17 | 110 |
| Capacity(MMgal/yr) | 60 | 60 | 60 | 60 | 60* | 72 | 69 |
| Biofuel yield (kg/kg _{wet}) | 0.28 | 0.20 | 0.33 | 0.24 | 0.11 | 0.96 | 0.48 |
| Production cost (\$/gal) | 0.80 | 0.41 | 0.81 | 0.72 | 0.68* | 0.66 | 0.42 |
| Water consumption(gal/gal) | 1.66 | 0.36 | 1.59 | 0.15 | -- | 0.33 | 0.60 |
| Energy consump. (MJ/gal) | -10.2 | -9.5 | 27.2 | -62.0 | -3.84* | 1.94 | 1.94 |
| Byproduct | Energy CO ₂ | Hydrogen Mix alcohols Energy CO ₂ | Hydrogen CO ₂ | Green Gasoline Energy CO ₂ | Energy CO ₂ | Glycerol | Glycerol Fertilizer |

(*) For Hydrogen instead of gal, kg is used

In order to design a biorefinery that is capable of fully using the entire corn plant and serve as a bridge between the first and second generation of bioethanol, an integrated design of dry grind and gasification technologies has been proposed using the process simulation tool MIPSYN, Mixed-Integer Process SYNthesizer¹⁷⁸ which is an implementation of the modeling and decomposition (M/D) strategy developed by Kocis and Grossmann¹⁷⁹ (1989) and the outer-approximation and equality-relaxation algorithm (OA/ER) by Kocis and Grossmann²⁰. MIPSYN enables automated execution of simultaneous topology and parameter optimization of processes enabling the solution of large scale MINLP problems. For the simultaneous optimization and heat integration, the model by Duran and Grossmann²³ is also implemented in MIPSYN. The aim is to optimize the integrated biorefinery that uses the entire corn plant by integrating the technologies required to process the corn grain and the corn stover in such a way that equipment can be shared and most importantly, energy can be integrated due to the high demand of energy in the dry-grind process.⁴⁶ Figure 13 presents the flowsheet for the integration of the processes. In this way we can evaluate the trade-offs that arise between both processes:

-The dry-grind and thermo-biochemical processes require energy, while the thermo-chemical process generates energy due to the exothermic synthesis reaction at high temperature

-The ethanol-water mixture from the fermentors can be dehydrated using the same technologies

- If the thermo-chemical path is selected, the only common part is the technology for CO₂ capture.

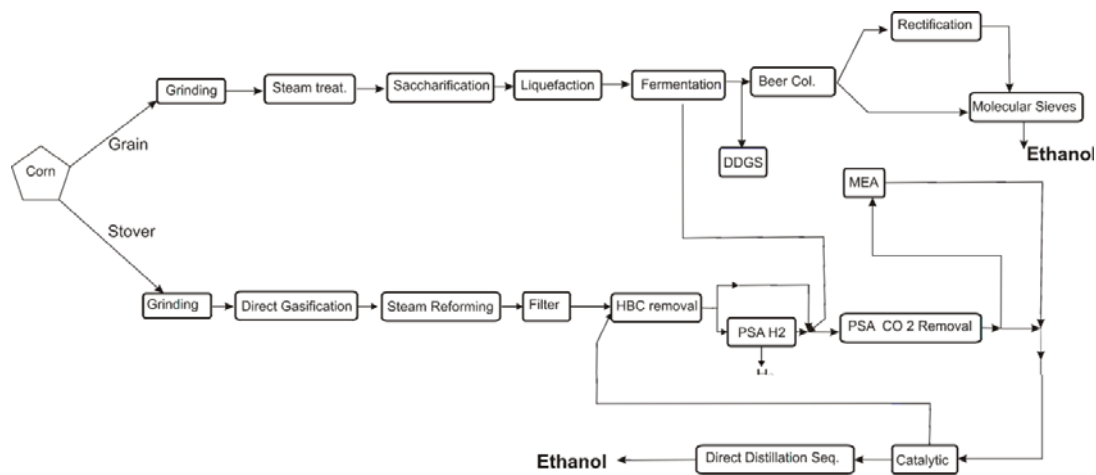


Figure 13.- Process integration for the simultaneous production of food and ethanol from corn

The lowest cost integrated process, uses the thermo-chemical path for transforming the lignocellulosic material into ethanol, especially due to good heat integration in spite of a lower yield towards ethanol ($0.28 \text{ kg}_{\text{ethanol}}/\text{kg}_{\text{biomass}}$ vs. $0.30 \text{ kg}_{\text{ethanol}}/\text{kg}_{\text{biomass}}$). In contrast, the flowsheet with the highest profit consists of the dry-grind process and thermo-biochemical route.

5.-Conclusions

The strong competition in the energy market requires for alternative fuels based on biomass (e.g. bioethanol, biodiesel) to be produced in an efficient and sustainable way. Mathematical optimization techniques together with conceptual design have been traditionally used in the petrochemical industry to improve the performance and operation of the processes. Therefore, there is scope for the use of process systems engineering to optimized the design and operation of future biorefineries as has been shown in this paper. A sustainable design must include a process optimized in terms of energy and freshwater consumption as the two most important indices for good operation. Mathematical techniques and the newly developed technologies have been used to develop attractive conceptual designs for the production of bioethanol, biodiesel, hydrogen and other

chemicals. Although comparison with other work and reports are always difficult, and ultimately validation is required with more detailed studies or pilot plant data, the results that we have obtained point to production costs and water usages that are often below the current industrial practice. Finally, for the sake of further reducing the operating costs, biorefineries should be operated as multiproduct facilities. Their operation is complex and mathematical programming techniques can also be used to help in the decision making process of which product to obtain and how much to produce.

Acknowledgments

The authors gratefully acknowledge the *NSF Grant CBET0966524* and the Center for Advanced Process Decision-making at Carnegie Mellon University. Dr. M. Martin gratefully acknowledges the financial support from the Ministry of Education and Science of Spain and Fulbright commission providing a MICINN – Fulbright Postdoctoral fellowship.

6.- References

- (1) Minnesota Technical Assistance Program, MTAP, (2008) Ethanol Benchmarking and best practices. The production process and potential for improvement, <http://www.mntap.umn.edu/ethanol/resources/EthanolReport.pdf>. Last accessed Dec. 2011
- (2) Wu, M.; Mintz, M.; Wang, M.; Arora, S.; Consumptive water use in the production of ethanol and petroleum gasoline. ANL/ESD/09-1, 2009
- (3) Jimenez-Gonzalez, C.; Woodley, J.M. Biprocesses: modelling needs for process evaluation and sustainability assessment. *Comp. Chem Eng.* **2010**; 34(7): 1009-1017
- (4) Jacques, K.; Lyons, T. P.; Kelsall, D. R.: *The Alcohol Textbook*, 3rd ed.; Nottingham University Press.; United Kingdom, 1999
- (5) Aden, A.; Ruth, M.; Ibsen, K.; Jechura, J.; Neeves, K.; Sheehan, J.; Wallace, B. Lignocellulosic Biomass to Ethanol Process Design and Economics Utilizing Co-Current Dilute Acid Prehydrolysis and Enzymatic Hydrolysis for Corn Stover, NREL/TP-510-32438 , 2002
- (6) Knothe, G, Gerpen, J.V.; Krahl, J. *The Biodiesel Handbook*. AOCS Press. 2004. Champaign. Illinois.
- (7) Phillips, S.; Aden, A.; Jechura, J. and Dayton, D.; Eggeman, T. Thermochemical Ethanol via Indirect Gasification and Mixed Alcohol Synthesis of Lignocellulosic Biomass *Technical Report*, NREL/TP-510-41168, April 2007
- (8) Zhang, Y.; Dube, M. A.; McLean, D. D.; Kates, M. Biodiesel Production from Waste Cooking Oil: 1. Process Design and Technological Assessment. *Bioresour. Technol.* **2003**; 89: 1-16.
- (9) West, A.H.; Posarac, D.; Ellis, N. Assessment of four biodiesel production processes using HYSYS. *Plant Bioresour. Technol.* **2009**; 99: 6587–6601
- (10) Swanson, R.M.; Platon, A.; Satrio, J.A.; Brown, R.C. Techno-economic analysis of biomass-to-liquids production based on gasification. *Fuel*, **2010**; 89: Suppl. 1, S11-S19

- (11) Grossmann, I.E.; Martin, M. Energy and Water Optimization in Biofuel Plants. *Chinese J. Chem. Eng.* **2010**; 18 (6): 914-922
- (12) Rudd, D.; Powers, G.; & Sirola, J. *Process synthesis*. Englewood Cliffs, NJ. 1973. Prentice-Hall.
- (13) Douglas, J. *Conceptual design of chemical processes*. McGraw-Hill. 1988.
- (14) Linnhoff, B. (1993). Pinch analysis—A state-of-the-art overview. *Chem. Eng. Res. Des.* **1993**; 71(a5): 503–522.
- (15) Grossmann, I.; Caballero, J.; Yeomans, H. Mathematical programming approaches to the synthesis of chemical process systems. *Korean J. Chem. Eng.* **1999**; 16(4): 407–426.
- (16) Yee, T.; Grossmann, I. E. Simultaneous-optimization models for heat integration. 2. Heat-exchanger network synthesis. *Comp. Chem. Eng.* 1990; 14(10): 1165–1184.
- (17) Yeomans, H.; Grossmann, I. E. (1999). A systematic modeling framework of superstructure optimization in process synthesis. *Comp. Chem. Eng.* **1999**; 23(6): 709–731.
- (18) Papoulias, S. A.; Grossmann, I. E. A structural optimization approach in process synthesis. 2. Heat-recovery networks. *Comp. & Chem. Eng.*; 1983; 7(6): 707–721.
- (19) Papalexandri, K.P.; Pistikopoulos, E.N. , A decomposition-based approach for process optimization and simultaneous heat integration: Application to an industrial process, *Chem. Eng. Res. & Des.* **1998**; 76, 273-286
- (20) Kocis, G.; Grossmann, I. Relaxation strategy for the structural optimization of process flow sheets. *Ind. Eng. Chem. Res.* **1987**; 26(9): 1869–1880.
- (21) Smith, E. M. B.; Pantelides, C. C. Design of reaction separation networks using detailed models. *Comp. Chem. Eng.* **1995**; 19: s83–s88
- (22) Grossmann, I.; Aguirre, P.; Bartfeld, M. Optimal synthesis of complex distillation columns using rigorous models. *Comp. Chem. Eng.* **2005**; 29(6): 1203–1215
- (23) Duran, M.; Grossmann, I. E. Simultaneous-optimization and heat integration of chemical processes. *AIChE J.* **1986**; 32(1): 123–138.
- (24) Grossmann, I. E.; Yeomans, H.; & Kravanja, Z. A rigorous disjunctive optimization model for simultaneous flowsheet optimization and heat integration. *Comp. Chem. Eng.* **1998**; 22: S157–S164.
- (25) Wang, Y. P.; Smith, R. Waste water minimisation. *Chem. Eng. Sci.*; **1994**; 49: 981–1006
- (26) Karuppiah, R.; Grossmann, I. E. Global optimization for the synthesis of integrated water systems in chemical processes. *Comp. Chem. Eng.* **2006**; 30(4): 650–673.
- (27) Bagajewicz, M. A review of recent design procedures for water networks in refineries and process plants. *Comp. Chem. Eng.* **2000**; 24(9–10): 2093–2113.
- (28) Bagajewicz, J.; Faria, D. On the appropriate architecture of the water/wastewater allocation problem in process plants, *Comp. Aidd. Chem. Eng.* **2009**; 26: 1–20 Elsevier Science B.V.
- (29) Jezowski, J. Review and analysis of approaches for designing optimum industrial water networks. *Chem. Process Eng.* **2008**; 29: 663–681.

- (30) Ahmetovic E.; Grossmann, I. E. Global superstructure optimization for the design of integrated process water networks. *AIChE J.* **2011**, 57 (2), 434–457.
- (31) Carvahlo, A.; Gani, R.; Matos, H. Design of sustainable processes: Systematic generation and evaluation of alternatives. *Comp. Aid. Chem. Eng.* **2006**; 21A: 817–822. Elsevier Science B.V.
- (32) Guillen-Gosalbez, G.; Caballero, J.; Jimenez, L. Application of life cycle assessment to the structural optimization of process flowsheets. *Ind. Eng. Chem. Res.* **2008**: 47(3): 777–789.
- (33) Halasz, L.; Povoden, G.; Narodoslowsky, M. Sustainable processes synthesis for renewable resources. *Resour. Conserv. Recycl.*; **2005**; 44(3): 293–307.
- (34) Stefanis, S.; Livingston, A.; Pistikopoulos, E. N. (1995). Minimizing the environmental impact of process plants—A process systems methodology. *Comp. Chem. Eng.* **1995**; 19: S39–S44.
- (35) Steffens, M.; Fraga, E.; & Bogle, I. Multicriteria process synthesis for generating sustainable and economic bioprocesses. *Comp. Chem. Eng.* **1999**; 23(10): 1455–1467.
- (36) Hostrup, M.; Harper, P.; & Gani, R. Design of environmentally benign processes: Integration of solvent design and separation process synthesis. *Comp. Chem. Eng.* **1999**; 23(10): 1395–1414.
- (37) Pistikopoulos, E.; Stefanis, S. Optimal solvent design for environmental impact minimization. *Comp. Chem. Eng.*; 1998; 22(6): 717–733.
- (38) Agrawal, R.; Singh, N.; Ribeiro, F.; & Delgass, W. Sustainable fuel for the transportation sector. *PNAS* **2007**; 104(12); 4828–4833.
- (39) Karuppiyah, R.; Peschel, A.; Grossmann, I. E.; Martin, M.; Martinson, W.; & Zullo, L. Energy optimization for the design of corn-based ethanol plants. *AIChE J.*; **2008**; 54(6): 1499–1525.
- (40) Martín, M.; Grossmann, I. E. Energy optimization of Bioethanol production via Gasification of switchgrass. *AIChE J.* **2011**, 57 (12): 3408-3428
- (41) Martín, M.; Grossmann, I.E. Energy optimization of Bioethanol production via hydrolysis of switchgrass. *AIChE J.* **2011**, 10.1002/aic.12735
- (42) Sammons, N.; Eden, M.; Cullinan, H.; Perine, L.; Connor, E. A flexible framework for optimal biorefinery product allocation *Computer Aided Chemical Engineering*, **2006**, 21, 2057-2062
- (43) Sammons, N.E.; Yuan, W.; Eden, M.R.; Aksoy, B.; Cullinan, H.T. A systematic framework for biorefinery production optimization. *Computer Aided Chemical Engineering*, **2008**, 25, 1077-1082
- (44) Kokossis, A.; Yang, A. On the use of systems technologies and a systematic approach for the synthesis and the design of future biorefineries. *Com. Chem. Eng.*; **2010**, 34, 1397-1405
- (45) Mansoornejad, B.; Chambost, V.; Stuart, P. Integrating product portfolio design and supply chain design for the forest biorefinery *Comp. Chem. Eng.* **2010**, 34, 9, 1497-1506
- (46) Cucek, L.; Martín, M.; Grossmann, I.E.; Kravanja, Z.; Integration of Process Technologies for the Simultaneous Production of fuel Ethanol and food from Corn grain and stover. *Comp. Chem. Eng.* **2011**, 35 (8), 1547-1557
- (47) Cole, D.E. Issues facing the Auto Industry: Alternative Fuels, Technologies, and Policies ACP Meeting Eagle Crest Conference Center June 20, 2007

- (48) Nigam, P.S.; A. Singh. Production of liquid biofuels from renewable resources. *Prog. Energy Combustion Sci.*; **2011**. 37, 52-68.
- (49) Shurtleff, D.S. (2008-05-07). "Brazil's energy plan examined". *The Washington Times*. <http://www.washingtontimes.com/article/20080507/COMMENTARY/381443705/1012/commentary> (last accessed Dec. 2011)
- (50) Gen Soltions. Risk assessment for bioenergy manufacturing facilities in Alberta Report E 06 019. 2007
- (51) Henke, S.; Bubnik.; Z.; Hinková, A.; Pour, V. Model of a sugar factory with bioethanol production in program Sugars. *J. Food. Eng.* **2006**, 77: 416-420
- (52) Hunt, V. D.; *The Gasohol Handbook*, Industrial Press Inc.; 1981
- (53) Goettemoeller, J.; Goettemoeller, A. *Sustainable Ethanol: Biofuels, Biorefineries, Cellulosic Biomass, Flex-Fuel Vehicles, and Sustainable Farming for Energy Independence*, Praire Oak Publishing, Maryville, Missouri, 2007, 42, ISBN 978-0-9786293-0-4.
- (54) Patzek, P.; Thermodynamics of the corn-ethanol biofuel cycle: *Critical Reviews in Plant Sciences*. **2004**, 23(6),519-567
- (55) Shapouri, H.; Duffield, J.A.; Wang, M. The energy balance of corn ethanol: An Update. *Agricultural Economic Report Number 813*. 2002
- (56) Pimentel,D.; The limitations of biomass energy, in Meyers, R.;ed.; *Encyclopedia of Physical Science and Technology*. (3rd edn.), Vol. 2: Academic, San Diego, CA, 159–171 (2001).
- (57) Keeney D.R.; DeLuca T.H. Biomass as an energy source for the mid-western US In *Amer. J. Alternative Agric*, **1992**, 7, 137-143
- (58) Wang, M.; Saricks, C.; Santini , D. Effects of fuel ethanol use on fuel-cycle energy and greenhouse gas emissions.USDOE Argonne National laboratory, Center for Transportation Research, Argonne, IL. ANL/ESD-38, <http://www.transportation.anl.gov/pdfs/TA/58.pdf> (1999).
- (59) Wang, M.; Wu, M.; Huo, H. Life-Cycle Energy and Greenhouse Gas Emission Impacts of Different Corn Ethanol Plant Types *Environ. Res. Lett.* **2007**, 2, 1-13
- (60) Aden. A. Water Usage for Current and Future Ethanol Production. *Southwest Hydrology*, **2007**: September/October. 22-23
- (61) Pfromm, P H . The minimum water consumption o Ethanol production via Biomass fermentation. *The open Chem. Eng. J.* **2008**, 2, 1-5
- (62) Ahmetovic, E.; Martín, M.; Grossmann, I. E. Optimization of Water Consumption in Process industry: Corn based ethanol case study. *Ind. Eng. Chem. Res.* **2010**, 49 (17), 7972–7982.
- (63) Delta T 2009 . <http://news.thomasnet.com/companystory/525435>
- (64) Martín, M.; Ahmetovic, E.; Grossmann, I.E. Optimization of Water consumption in second generation Bioethanol plants. *Ind. Eng. Chem. Eng.* **2010**, 50(7), 3705–3721
- (65) Chisti, Y. Biodiesel from microalgae *Biotechnol. Adv.* **2007**, 25, 294-306.
- (66) United Nations Food and Agriculture Organization "The State of Food and Agriculture." 2008

- (67) Oak Ridge National Laboratory "Biofuels from Switchgrass: Greener Energy Pastures." 2005
- (68) Fulton, L. Biodiesel: technology perspectives. Geneva UNCTAD Conference. 2006
- (69) Dutta, A.; Phillips, S.D. Thermochemical Ethanol via Direct Gasification and Mixed alcohol Synthesis of Lignocellulosic Biomass. NREL/ TP-510-45913. 2009
- (70) Aden, A.; Foust, T. Technoeconomic analysis of the dilute sulfuric acid and enzymatic hydrolysis process for the conversion of corn stover to ethanol. *Cellulose*, **2009**, 16, 535-545
- (71) Kazi, F.K.; Fortman, J.A.; Anex, R.P.; Hsu, D.D.; Aden, A.; Dutta, A.; Kothandaraman, G, Technoeconomic comparison of process technologies for biochemical ethanol production from corn stover. *Fuel*, **2010**, 89(1), S20-S28
- (72) Piccolo, C.; Bezzo, F.; A techno-economic comparison between two technologies for bioethanol production from lignocelluloses. *Biomass Bioenergy* **2009**, 33, 478 – 491
- (73) He, J.; Zhang, W. Techno-economic evaluation of thermo-chemical biomass-to-ethanol- *Appl. Energy*. **2011**, 88, 1224-1232.
- (74) Synbio <http://www.synbio.org.uk/component/content/article/99-biotechnology-news/551-gm-and-coskata-claim-cellulosic-ethanol-has-arrived-gasification-fermentation-process-yields-biofuel-for-under-1-per-gallon.html?directory=260> accessed Nov 17 2009,
- (75) El Mundo. Abengoa ensaya en Salamanca su planta de bioetanol para EEUU. 13th June 2011 <http://www.elmundo.es/elmundo/2011/06/13/castillayleon/1307953309.html>. Last accessed Dec. 2011
- (76) Gissy, J. Knight, R.A.; Onischak, M.; Carty, R.H.; Babu, S.P. Technology development and comercialization of the Renugas Process U.S. Finland Biofuels Workshop II. Espoo August 24-30. 1992
- (77) Nielsen, D.R.; Prather, K.J. Adsorption of second generation biofuels using polymer resins with in situ product recovery (ISPR) applications. Paper 564f AIChE Annual meeting 2009 Nashville.
- (78) Huhnke, R. L. Cellulosic ethanol using gasification-fermentation. Resource: Engineering & Technology for a Sustainable World <http://www.articlearchives.com/energy-utilities/renewable-energy-biomass/896186-1.html> accessed Nov 17 2009
- (79) Schell, D.J.; Farmer, J.; Newman, M.; McMillan, J.D. Dilute _ Sulfuric Acid Pretreatment of Corn Stover in Pilot – Scale reactor. *Appl. Biochem. Biotechnol.* **2003**, 105-108, 69-85
- (80) Zhang, S.; Marechal, F.; Gassner, M.; Perin-Levasseur, Z.; Qi, W.; Ren, Z.; Yan, Y.; Favrat, D.; Process Modeling and Integration of Fuel Ethanol Production from Lignocellulosic Biomass Based on Double Acid Hydrolysis. *Energy Fuels*, **2009**, 23 (3), 1759–1765
- (81) Sun, Y.; Cheng, J.; Hydrolysis of lignocellulosic materials for ethanol production: a review. *Bioresour. Technol.* **2002**, 83, 1-11
- (82) Alizadeh, H.; Teymouri, F.; Gilbert, T.I. and Dale, B.E. Pretreatment of switchgrass by ammonia fiber explosion (AFEX) *Applied Biochem. Biotechnol.* **2005**, 121-124, 1133-1141
- (83) Murnen, H.K.; Balan, V.; Chundawat, S.P.S.; Bals.; B.; Sousa, L.da C.; Dale, B.E. Optimization of Ammonia fiber expansion (AFEX) pretreatment and enzymatic hydrolysis of *Miscanthus x giganteus* to Fermentable sugars. *Biotechnol. Prog.* **2007**, 23, 846-850

- (84) Hamelinck, C.N.; Hooijdonk, G. v.; Faaij, A.P.C. Ethanol from lignocellulosic biomass: techno-economic performance in short-, middle- and long-term. *Biomass Bioenergy*. **2005**, *28*, 384-410
- (85) Gregg, D.; Saddler, J.N. Bioconversion of lignocellulosic residue to ethanol: Process flowsheet development. *Biomass Bioenergy* **1995**, *9*, 1-5, 287-302
- (86) Wooley, R.J.; Putsche, V. Development of an ASPEN PLUS Physical Property Database for Biofuels Components NREL/MP-425-20685, 1996, <http://www.p2pays.org/ref/22/21210.pdf>
- (87) Brown, R.C.; Wright, M.; (2009) Biomass conversion to fuels and electric power. Pages 53-64, in R.W. Howarth and S. Bringezu (eds) *Biofuels: Environmental Consequences and Interactions with Changing Land Use*. Proceedings of the Scientific Committee on Problems of the Environment (SCOPE) International Biofuels Project Rapid Assessment, 22-25 September 2008, Gummersbach Germany. Cornell University, Ithaca NY, USA. (<http://cip.cornell.edu/biofuels/>)
- (88) Martín, M.; Grossmann, I.E. Process optimization of FT diesel production from lignocellulosic switchgrass (*Ind. Eng. Chem. Res.* **2011**, *50*(23), 13485–13499
- (89) Hamelinck, C.N.; Faaij, A.P.C. Future prospects for production of methanol and hydrogen from biomass *J. Power Sources* **2002**, *111*, 1–22
- (90) Levin, D. B.; Pitt, L.; Love, M. Biohydrogen production: prospects and limitations to practical application. *Int. J. Hydro. Energ.* **2004**, *29*, 173-185
- (91) Mueller_langer, F.; Tzimas, E.; Kalschmitt, M.; Peteves, S. Techno-economic assessment of hydrogen production process for the hydrogen economy for the short and medium term *Int. J. Hydrogen Energ.* **2007**, *32*, 3797-3810
- (92) Gao, N.; Li, Aimin; Quan, C. A novel reforming method for hydrogen production from biomass steam gasification. *Bioresource Technol.* **2009**, *100*, 4271-4277
- (93) Kalinci, Y.; Hepbasli, A.; Dincer, I. Biomass-based hydrogen production: A review and analysis. *Int. J. Hydro. Energ.* **2009**, *34*, 8799-8817
- (94) Li, F.; Zeng, L.; Fan, L.S. Techno-Economic Analysis of Coal-Based Hydrogen and Electricity Cogeneration Processes with CO₂ Capture *Ind. Eng. Chem. Res.* **2010**, *49*(21), 11018–11028
- (95) Ji, P.; Feng, W.; Chen, B.; Production of ultrapure hydrogen from biomass gasification with air. *Chem.Eng. Sci.* **2009**. *64*. 582 – 592
- (96) Lau, F.S.; Bowen, D.A.; DiHu, R.; Doong, S.; Hughes, E.E.; Remick, R.; Slimane, R.; Turn, S. Q, Zabransky, R. Techno-Economic Analysis of Hydrogen Production by Gasification of Biomass Final Technical Report Work Performed Under DOE Contract Number: DE-FC36-01GO11089, 2002.
- (97) Spath, P.; Aden, A.; Eggeman, T.; Ringer, M.; Wallace, B.; Jechura, J. Biomass to Hydrogen Production Detailed Design and Economics Utilizing the Battelle Columbus Laboratory Indirectly-Heated Gasifier. *Technical Report NREL/ TP-510-37408* May 2005
- (98) Bain, R. (2009) Indirectly Heated Gasification of Biomass to Produce Hydrogen http://www.hydrogen.energy.gov/pdfs/progress09/ii_b_1_bain.pdf (last accessed February 2011)
- (99) Feng, X.; Wang, L.; Min, S. Industrial energy evaluation for hydrogen production system from biomass and natural gas. *Appl. Energy*, **2009**, *86*, 1767-1773

- (100) Sarkar, S.; Kumar, A.; A Review of Techno-economics of Bio-hydrogen Production Technologies ASAE Annual Meeting, 2007. 071649.
- (101) Doong, S.; Roberts, M.; Lau, F.; Direct hydrogen production from biomass gasifier using hydrogen selective membrane. GTI Presentation to Minnesota Renewable Hydrogen Initiative Forum. May 27, 2005
- (102) Fu, C.H.; Wu, J.C.S.J. Mathematical simulation of hydrogen production via methanol steam reforming using double-jacketed membrane reactor Int. J. of Hydrogen Energy, **2007**, 32, 4830-4839
- (103) Adrover, M.E.; López, E.; Borio, D.O.; Pedernera, M.N. Simulation of a membrane reactor for the WGS reaction: Pressure and thermal effects. Chem. Eng. J. **2009**, 154 (1-3), 196-20
- (104) Sa, S.; Silva, H.; Sousa, J.M.; and Mendes, A. Hydrogen production by methanol steam reforming in a membrane reactor: Palladium vs carbon molecular sieve membranes J. Membr. Sci. **2009**, 339, 160-170
- (105) Martín, M.; Grossmann, I.E. Energy optimization of Hydrogen production from biomass. Com. Chem Eng. **2011**, 35 (9), 1798-1806
- (106) Scholl, K. W.; Sorenson, S. C. Combustion of soybean oil methyl ester in a direct injection diesel engine. SAE Paper No. 930934. Warrendale, Mich.: 1993. SAE. Schwab, A. W.; M. O. Bagby, and B. Freedman
- (107) Wagner, L. E.; S. J. Clark, and M. D. Schrock. Effects of soybean oil esters on the performance, lubrication oil, and water of diesel engines. SAE Paper No. 841385. Warrendale, 1984. Mich.: SAE.
- (108) Korus, R. A.; T. L. Mousetis, and L. Lloyd. (1982). Polymerization of vegetable oils. In Vegetable Oil Fuels — Proc. Int. Conf. on Plant and Vegetable Oils as Fuels, 218-223, Fargo, N.D.; 2-4 August. St. Joseph, Mich.: ASAE
- (109) Perkins, L. A.; Peterson, C. L.; Auld, D. L. Durability testing of transesterified winter rape oil (*Brassica Napus* L.) as fuel in small bore, multi-cylinder, DI, CI Engines. SAE Paper No. 911764. Warrendale, 1991. Mich.: SAE.
- (110) Pestes, M. N.; J. Stanislawo. Piston ring deposits when using vegetable oil as a fuel. J. Testing & Eval. 1984; 12(2): 61-68.
- (111) Kusy, P. F. Trans-esterification of plants oils for fuels. *Proc. International Conference on Plant and Plant Oils as fuels*. American Society of Agricultural Engineers, **1982**, 4(82), 127-137.
- (112) Fukuda, H.; Kondo, A.; Noda, H. Biodiesel fuel production by transesterification of Oils. J. Biosci. Bioengng. **2001**, 92(5), 405-416
- (113) Canakci, M.; Van Gerpen, J. Biodiesel Production via Acid Catalysis Transactions of the ASAE. **1999**, 42(5), 1203-1210
- (114) Levelton Engineering Ltd. Assessment of biodiesel and ethanol diesel blends, greenhouse gas emissions, exhaust emissions, and policy issues September 30, 2002
- (115) Shahid, E.M.; Jamal, Y. A review of biodiesel as vehicular fuel. Renew. Sust. Energ. Revs, **2008**, 12, 2484–2494
- (116) Tao, L.; Aden, A. The economics of current and future biofuels. In Vitro Cell. Dev. Biol. Plant **2009**, 45, 199-217

- (117) Kulkarni, M.G.; Dalai, A.K. Waste Cooking Oils An Economical Source for Biodiesel: A Review Ind. Eng. Chem. Res. **2006**, 45, 2901-2913
- (118) Felizardo, P.; Neiva, M.J. Correia, Idalina R. Mendes, J. F, Berkemeier, R.; Bordado, J.M. (2006) Production of biodiesel from waste frying oils Waste Manage. **2006**, 26, 487-494
- (119) Phan, A.N.; Phan, T.M. Biodiesel production from waste cooking oils. Fuel. **2008**; 87, 3490-3496
- (120) Banerjee, A.; Chakraborty, R. Parametric sensitivity in transesterification of waste cooking oil for biodiesel production—A review Resour. Conserv. Recycl. **2009**, 53, 490-497
- (121) Wiltsee, G. Urban Waste Grease Resource Assessment* Prepared by Appel Consultants, Inc. Valencia, California for National Renewable Energy Laboratory. 1998, NREL/SR-570-26141
- (122) Pugazhvidivu, M.; Jeyachandran, K. Investigations on the performance and exhaust emissions of a diesel engine using preheated waste cooking oil as a fuel. Renew Energy **2005**, 30, 2189-2202.
- (123) Knothe, G, Gerpan, J and Krahl, J. The Biodiesel Handbook. AOCS Press, 1994. Urbana, USA
- (124) Marchetti, J.M.; Miguel, V.U.; Errazu, A.F. Techno-economic study of different alternatives for biodiesel production Fuel Proces. Technol. **2008**, 89, 740 – 748
- (125) Meher, L.C.; Vidya-Sagar D.; Naik, S.N. Technical aspect of biodiesel production by transesterification—a review. Renew Sustain Energy Rev. **2006**, 10, 248-68
- (126) Sharma. Y.C.; Singh, B.; Upadhyay, S.N. Advancements in development and characterization of biodiesel: a review. Fuel **2008**, 87, 2355-2373.
- (127) Tomasevic, A.V.; Siler-Marinkovic, S.S.; Methanolysis of used frying oil. Fuel Process Technol. **2003**, 81, 1-6.
- (128) Ulla, Z.; Kocak, M.S. The effect of biodiesel fuel obtained from waste frying oil on direct injection diesel engine performance and exhaust emissions. Renew Energy. **2008**, 35, 1936-1941.
- (129) Zheng, S.; Kates, M.; Dube, M.A.; McLean, D.D. Acid-catalyzed production of biodiesel from waste frying oil. Biomass Bioenergy. **2006**, 30, 267-272.
- (130) Vlysidis, A.; Binns, M.; Webb, C.; Theodoropoulos, C. A techno-economic analysis of biodiesel biorefineries: Assessment of integrated designs for the co-production of fuels and chemicals. Energy. **2011**, 36, 4671-4683.
- (131) Zhang, Y.; Dube, M. A.; McLean, D. D.; Kates, M. Biodiesel production from waste cooking oil: 2. Economic assessment and sensitivity analysis Bioresour. Technol. **2003**, 90, 229-240
- (132) Haas, M.J.; McAloon, A.J.; Yee, W.C.; Foglia, T.A. A process model to estimate biodiesel production costs Bioresour. Technol. **2006**, 97, 671-678
- (133) Harding, K.G.; Dennis, J.S.; von Blottnitz, H.; Harrison, S.T.L. A life-cycle comparison between inorganic and biological catalysis for the production of biodiesel J. Cleaner Prod. **2007**, 16, 1368-1378
- (134) Apostolakou, A.A.; Kookos, I.K.; Marazioti, C.; Angelopoulos, K.C. Techno-economic analysis of a biodiesel production process from vegetable oils Fuel Process. Technol. **2009**, 90, 1023-1031
- (135) Glisic, S.; Skala, D.; The problems in design and detailed analyses of energy consumption for biodiesel synthesis at supercritical conditions J. Superc. Fluids **2009**, 49 (2), 293-301

- (136) Diaz, M. S.; Espinosa, S.; Brignole, E. A. Model-Based Cost Minimization in Noncatalytic Biodiesel Production Plants. *Energ. Fuel.* **2009**, *23*, 5587–5595
- (137) Santana, G.C.S.; Martins, P.F.; de Lima da Silva, N.; Batistella, C.B. Maciel Filho, R.; Wolf Maciel, M.R. Simulation and cost estimate for biodiesel production using castor oil, *Chem Eng. Res. Des.* **2010**, *88* (5-6), 626-632
- (138) Sotoft, L.F.; Rong, B.G.; Christensen, K.V.; Norddahl, B. Process simulation and economical evaluation of enzymatic biodiesel production plant. *Bioresour Technol.* **2010**, *101* (14), 5266-5274.
- (139) van Kasteren, J.M.N.; Nisworo, A.P. A process model to estimate the cost of industrial scale biodiesel production from waste cooking oil by supercritical transesterification *Resour. Conserv. Recycl.* **2007**, *50*, 442–458
- (140) Pate, R.; M.Hightower, C.Cameron, and W.Einfeld. Overview of Energy-Water Interdependencies and the Emerging Energy Demands on Water Resources. Report SAND 2007-1349C. Los Alamos, NM: Sandia National Laboratories. 2007.
- (141) Martín, M.; Grossmann, I.E. Process optimization biodiesel production from cooking oil and Algae. *Rev. Submitted. Ind. Eng. Chem. Res.* (2011)
- (142) Cortright R.D.; Davda R.R.; Dumesic, J.A. Hydrogen from catalytic reforming of biomass-derived hydrocarbons in liquid water. *Nature* 2002; *418*, 964–946.
- (143) Deluga G.A.; Salge J.R.; Schmidt L.D.; Verykios X.E. Renewable hydrogen from methanol by autothermal reforming. *Science.* **2004**, *303*(5660), 993–997.
- (144) Davda, R.R.; Shabker, J.W.; Huber, G.W.; Cortright, R.D.; Dumesic, J.A. A review of catalytic issues and process conditions for renewable hydrogen and alkanes by aqueous phase reforming of oxygenated hydrocarbons over supported metal catalysts. *Appl. Catal. B.* **2005**, *56*, 171–186.
- (145) Hashaikeh R.; Butler I.S.; Kozinski JA. Selective promotion of catalytic reactions during biomass gasification to hydrogen. *Energy Fuel.* **2006**, *20*, 2743–2746.
- (146) Dauenhauer, P.J.; Salge, J.R.; Schmidt, L.D. (2006) Renewable hydrogen by autothermal steam reforming of volatile carbohydrates. *J Catal.* **2006**, *244*, 238–247.
- (147) Byrd, A.J.; Pant, K.K.; Gupta, R.B. Hydrogen production from glycerol by reforming in supercritical water over Ru/Al₂O₃ catalyst. *Fuel.* **2008**, *87*, 2956–60.
- (148) Adhikari, S.; Fernando, S.D.; Haryanto, A. Hydrogen production from glycerol: An update. *Energ. Conver. Manage.* **2009**, *50*, 2600–2604
- (149) Adhikari, S.; Fernando, S.; Gwaltney, S.R.; Filip To.; S.D.; Bricka, R.M.; Steele, P.H.; Haryanto, A. A thermodynamic analysis of hydrogen production by steam reforming of glycerol. *Int. J. Hydrogen Energy.* **2007**, *32*, 2875-2880
- (150) Shell Chemicals. (2006) What is 1,3-propanediol (PDO)
http://www.shellchemicals.com/1_3_propanediol/1,1098,300,00.html. Accessed 23 November 2011
- (151) Dasari, M.A.; Kiatsimkul, P.P.; Sutterlin, W.R.; Suppes, G.J. Low-pressure hydrogenolysis of glycerol to propylene glycol. *Appl. Catal. A.* **2005**, *281*(1-2), 225-231.

- (152) Bauer, R.; N. Katsikis, S.Varga, and D.Hekmat Study of the inhibitory effect of the product dihydroxyacetone on *Gluconobacter oxydans* in a semi-continuous two-stage repeated-fed-batch process. *Bioprocess Biosyst. Eng.* **2005**, 28(1), 37-43
- (153) Zeikus, J.G. Chemical and fuel production by anaerobic bacteria. *Annu. Rev. Microbiol.* **1980**, 34, 423–464.
- (154) Clacens, J.M.; Y. Pouilloux, and J. Barrault. Selective etherification of glycerol to polyglycerols over impregnated basic MCM-41 type mesoporous catalysts. *Appl. Catal. A.* **2002**, 227(1-2), 181-190.
- (155) Pachauri, N.; & He, B. (2006) Value-added Utilization of Crude Glycerol from Biodiesel Production: A Survey of Current Research Activities *Paper Number: 066223* 2006 ASABE Annual International Meeting. <http://www.webpages.uidaho.edu/~bhe/pdfs/asabe066223.pdf>, last accessed Dec. 2011
- (156) Douette, A.M.D.; Turn, S.Q.; Wang, W.; Keffer, V.I. Experimental investigation of hydrogen production from glycerin reforming. *Energ. Fuel.* **2007**, 21, 3499-3504
- (157) Da Silva, A. L.; Malfatti, C. F.; Müller, I. L. Thermodynamic analysis of ethanol steam reforming using Gibbs energy minimization method: A detailed study of the conditions of carbon deposition. *Int. J. Hydro. Energy.* **2009**, 34, 4321-4330
- (158) Wang, X.; Li. S.; Wang, H.; Liu, B.; Ma, X. Thermodynamic Analysis of Glycerol Steam Reforming. *Energ. Fuel.* **2008**, 22, 4285-4291
- (159) Slinn, M.; Kendall, K.; Mallon, C.; Andrews, J. Steam reforming of biodiesel by-product to make renewable hydrogen *Bioresour. Technol.* **2008**, 99, 5851–5858
- (160) Mata, T. M.; Martins, A.A.; Nidia. S. Caetano, N.S. Microalgae for biodiesel production and other applications: A review *Renew. Sust. Energ. Revs.* **2010**, 14, 217–232
- (161) Johnson, D.A.; Sprague, S.; Liquid fuels from microalgae. *SERI/TP-231-3202.* 1987.
- (162) Zhang, W.; Wu, H.; Zong, M.; Optimal conditions for producing microalgal oil with high oleic acid content from *Chlorella vulgaris* LB 112 Technical Report. College of Light Industry and Food Sciences, South China University of Technology. 2009.
- (163) Pokoo-Aikins, G.; Nadim, A.; El-Halwagi, M.M.; Mahalec, V. Design and analysis of biodiesel production from algae grown through carbon sequestration. *Clean, Technol. Environ. Policy.* **2010**, 12 (3), 239-254
- (164) Univenture Inc. (2009)
- (165) Pimentel, D.; Patzek, T.W. Ethanol Production Using Corn, Switchgrass, and Wood; Biodiesel Production Using Soybean and Sunflower *Natural Resour. Res.*; **2005**, 14 (1), 65-76
- (166) Li, Y.; Horsman, M.; Wu, N.; Lan, C. Q.; Dubois-calero, N. Biofuels from algae. *Biotechnol. Prog.* **2008**, 24, 815-820
- (167) Rösch, C.; Skarka, J.; Patyk, A.; Microalgae opportunities and challenges of an innovative energy source. 17th European Biomass conferences and exhibition . 29 June-3 July Hamburg Germany 2009
- (168) Brennan, L.; Owende.; P. Biofuels from microalgae- A review of technologies for production, processing and extractions of biofuels and co-products. *Renew. Sust. Energ. Revs.* **2010**, 14, 557-577
- (169) Bush, R.A.; Hall, K.M. (2006) inventors, Process for the production of ethanol from algae

- (170) Chen, P.; Min.; M.; Chen.; Y.; Wang.; L.; Li.; Y.; Chen.; Q.; Wang.; C.; Wan.; Y.; Wang.; X.; Cheng.; Y.; Deng.; S.; Hennessy.; K.; Lin.; X.; Liu.; Y.; Wang.; Y.; Martinez, B.; Ruan. R. Review of the biological and engineering aspects of algae to fuels approach. *Int. J.; Agric. & Biol. Eng.* **2009**, 2 (4), 1-30
- (171) Wassick, J.M. Enterprise-wide optimization in an integrated chemical complex. *Comp. Chem. Eng.* **2009**, 33 (12), 1950-1963
- (172) Norton, L.C.; Grossmann, I.E. Strategic Planning Model for Complete Process Flexibility. *Ind. Eng. Chem. Res.* **1994**; 33, 69-76.
- (173) Sahinidis, N.V.; Grossmann, I.E. Optimization model for the long range planning in the chemical industry. *Comp. Chem. Eng.* **1989**, 13, 1049-1063.
- (174) Kamm, B.; Kamm, M.; Biorefineries –Multi Product Processes *Adv Biochem Engin/Biotechnol* **2007**, 105, 175–204
- (175) Luo, L.; Voet, E. van der.; Hupper, G. Biorefining of lignocellulosic feedstock- Technical, economic and environmental considerations. *Biores. Technol.* **2010**, 101, 5023-5032.
- (176) Cherubini, F. The biorefinery concept. Using biomass instead of oil for producing energy and chemicals. *Energy. Convers, Manage.* **2010**, 51, 1412-1421.
- (177) Kamm, B.; Kamm, M.; Principles of biorefinery. *Appl. Microbiol. Biotechnol.* **2004**, 64, 137–145.
- (178) Kravanja, Z. Challenges in Sustainable Integrated Process Synthesis and the Capabilities of an MINLP Process Synthesizer MipSyn, *Comp. Chem. Eng.* **2010**, 34 (11), 1831-1848
- (179) Kocis, G. R.; Grossmann, I. E. A Modelling and Decomposition Strategy for the MINLP Optimization of Process Flowsheets. *Comp. Chem. Eng.* **1989**, 13, 797-819